

# imagine<sup>®</sup>

your home reinvented.



***WINDCODE***<sup>®</sup>

**ARE YOU READY FOR THE STORM?**  
Florida Edition – Based on ASCE7-10 code



America's Favorite Garage Doors<sup>®</sup>



# WINDCODE® GARAGE DOORS

## DETERMINE YOUR WINDCODE® RATING

Clopay assigns a WINDCODE® "W" rating to our doors based on code requirements determined by wind speed in miles per hour (MPH), home exposure and home structural type.

### STEP 1:

- Determine the minimum wind speed (MPH) your door must meet or exceed from the map below, or go to [www.atcouncil.org/windspeed](http://www.atcouncil.org/windspeed). Determine if wind-borne debris is applicable. See map below.

### WIND-BORNE DEBRIS

The wind-borne debris region is also known as those areas that require the large missile impact rated windows. In Florida, being farther south and closer to the shoreline, it is more likely a home or building will be in the wind-borne debris region.


### HIGH VELOCITY HURRICANE ZONE (HVHZ)

Miami-Dade and Broward Counties require all garage doors meet the large missile impact rating, regardless if the garage door has windows or not. Standard windows are not available in Miami-Dade and Broward Counties.

Insurance companies sometimes give discounts for garage doors and other exterior building products that exceed the local building code, including meeting wind-borne debris requirements not mandated. This means that installing a new garage door with the large missile impact rating may reduce your insurance premiums. Please check with your insurance agent for details.

### WIND-BORNE DEBRIS REGIONS:

- Designated areas where the basic wind speed is 140 MPH or greater.
- High Velocity Hurricane Zone (HVHZ)
- 130 MPH and within 1 mile of the coast.

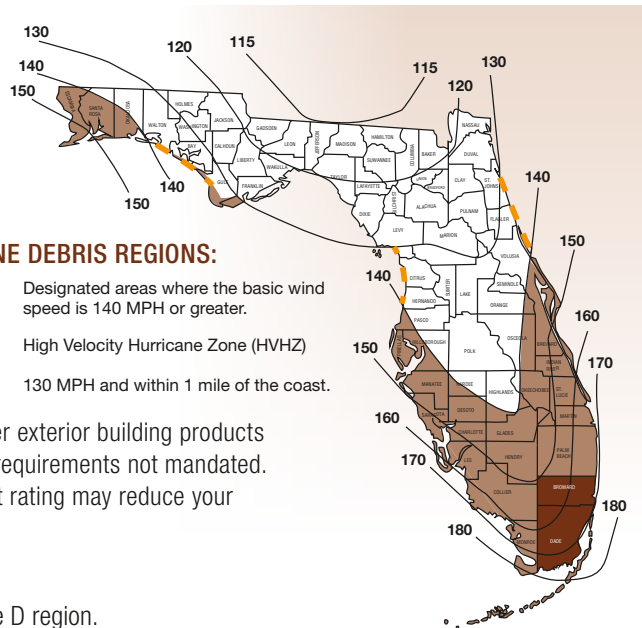

### STEP 2:

- Determine if your home is in an Exposure B, Exposure C or Exposure D region.


**Exposure B** is defined as urban and suburban areas, wooded areas or other terrain with numerous closely spaced obstructions.

**Exposure C** is defined as open terrain with scattered obstructions including flat open ground and grasslands. All of Miami-Dade and Broward Counties is Exposure C, unless it meets Exposure D definition.

**Exposure D** is defined as being within 600 ft. of the ocean front or other large body of water measuring at least 5,000 feet across. Contact building code official or DASMA Technical Data Sheet #155t for design pressures.

### STEP 3:

- Determine the structural type of your home.



### STEP 4:


- Using wind speed (MPH), exposure and structural type, find your required design pressure and WINDCODE® "W" rating in the charts on page 3.

*Note: It is important to also contact your homeowner's insurance company. Many insurance companies may require or encourage doors that are different than required by building code.*

### HELPFUL LINKS:

For Florida building code and product approvals visit: [www.floridabuilding.org](http://www.floridabuilding.org).

For Dade product approvals visit: [www.miamidade.gov/building/product-control.asp](http://www.miamidade.gov/building/product-control.asp).

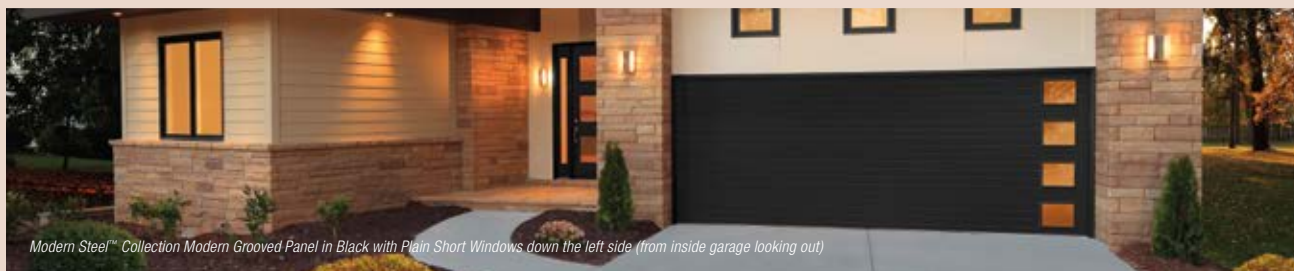

Modern Steel™ Collection Modern Grooved Panel in Black with Plain Short Windows down the left side (from inside garage looking out)

## DESIGN PRESSURES

The design wind load pressure rating of a door is expressed in PSF (pounds per square foot). The design pressure of the door must equal or exceed the design pressure for the garage door opening in which a door is to be installed. Design pressure has positive and negative values.

| GARAGE DOOR WIND LOAD GUIDE – VALUES IN PSF |                 |   |               |               |               |               |               |               |               |               |               |
|---|-----------------|---|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Mean Roof Height                            | Door Size       | Based on the 5th Edition Florida Building Code (2014) & ASCE7-10, Exposure B, 115 – 200 MPH Ultimate Design Wind Speed, MPH (V <sub>ult</sub> ) |               |               |               |               |               |               |               |               |               |
| Ultimate Wind Speed →                       |                 | 115 MPH   | 120 MPH       | 130 MPH       | 140 MPH       | 150 MPH       | 160 MPH       | 170 MPH       | 180 MPH       | 190 MPH       | 200 MPH       |
| Less Than 30 Feet                           | Single 9' x 7'  | 12.5<br>-14.2   | 13.7<br>-15.5 | 16.1<br>-18.2 | 18.5<br>-20.9 | 21.3<br>-24.1 | 24.3<br>-27.5 | 27.6<br>-31.2 | 30.6<br>-34.6 | 34.2<br>-38.6 | 38.0<br>-43.0 |
|   | Double 16' x 7' | 12.0<br>-13.4   | 13.1<br>-14.6 | 15.5<br>-17.2 | 17.7<br>-19.7 | 20.4<br>-22.7 | 23.3<br>-26.0 | 26.4<br>-29.4 | 29.3<br>-32.6 | 32.7<br>-36.5 | 36.4<br>-40.6 |
| Equivalent Nominal Wind Speed →             |                 | 89 MPH  | 93 MPH        | 101 MPH       | 108 MPH       | 116 MPH       | 124 MPH       | 132 MPH       | 139 MPH       | 147 MPH       | 155 MPH       |

| Mean Roof Height                | Door Size       | Based on the 5th Edition Florida Building Code (2014) & ASCE7-10, Exposure C, 115 – 200 MPH Ultimate Design Wind Speed, MPH (V <sub>ult</sub> ) |               |               |               |               |               |               |               |               |               |               |
|---------------------------------|-----------------|---|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Ultimate Wind Speed →           |                 | 115 MPH   | 120 MPH       | 130 MPH       | 140 MPH       | 150 MPH       | 160 MPH       | 170* MPH      | 175** MPH     | 180 MPH       | 190 MPH       | 200 MPH       |
| 15 Feet Single Story            | Single 9' x 7'  | 15.2<br>-17.2   | 16.6<br>-18.8 | 19.6<br>-22.2 | 22.4<br>-25.3 | 25.9<br>-29.2 | 29.5<br>-33.4 | 33.5<br>-37.8 | 35.3<br>-39.9 | 37.1<br>-42.0 | 41.5<br>-46.9 | 46.2<br>-52.2 |
|                                 | Double 16' x 7' | 14.6<br>-16.2   | 15.9<br>-17.7 | 18.8<br>-20.9 | 21.5<br>-23.9 | 24.8<br>-27.6 | 28.3<br>-31.5 | 32.1<br>-35.7 | 33.8<br>-37.7 | 35.5<br>-39.6 | 39.8<br>-44.3 | 44.2<br>-49.3 |
| 25 Feet Double Story            | Single 9' x 7'  | 16.8<br>-19.0   | 18.4<br>-20.8 | 21.7<br>-24.5 | 24.8<br>-28.0 | 28.6<br>-32.3 | 32.7<br>-36.9 | 37.0<br>-41.8 | 39.0<br>-44.1 | 41.1<br>-46.4 | 45.9<br>-51.9 | 51.1<br>-57.7 |
|                                 | Double 16' x 7' | 16.1<br>-18.0   | 17.6<br>-19.6 | 20.8<br>-23.1 | 23.7<br>-26.5 | 27.4<br>-30.5 | 31.3<br>-34.9 | 35.5<br>-39.5 | 37.4<br>-41.7 | 39.3<br>-43.8 | 44.0<br>-49.0 | 48.9<br>-54.5 |
| Equivalent Nominal Wind Speed → |                 | 89 MPH  | 93 MPH        | 101 MPH       | 108 MPH       | 116 MPH       | 124 MPH       | 132 MPH       | 136 MPH       | 139 MPH       | 147 MPH       | 155 MPH       |

| Mean Roof Height                | Door Size       | Based on the 5th Edition Florida Building Code (2014) & ASCE7-10, Exposure D, 115 – 200 MPH Ultimate Design Wind Speed, MPH (V <sub>ult</sub> ) |               |               |               |               |               |               |               |               |               |               |
|---------------------------------|-----------------|---|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Ultimate Wind Speed →           |                 | 115 MPH   | 120 MPH       | 130 MPH       | 140 MPH       | 150 MPH       | 160 MPH       | 170 MPH       | 175 MPH       | 180 MPH       | 190 MPH       | 200 MPH       |
| 15 Feet Single Story            | Single 9' x 7'  | 18.4<br>-20.8   | 20.1<br>-22.8 | 23.8<br>-26.8 | 27.2<br>-30.7 | 31.3<br>-35.4 | 35.8<br>-40.5 | 40.6<br>-45.9 | 42.7<br>-48.3 | 45.0<br>-50.8 | 50.3<br>-56.9 | 55.9<br>-63.2 |
|                                 | Double 16' x 7' | 17.7<br>-19.7   | 19.3<br>-21.5 | 22.7<br>-25.4 | 26.0<br>-29.0 | 30.0<br>-33.4 | 34.3<br>-38.2 | 38.8<br>-43.3 | 40.9<br>-45.6 | 43.1<br>-48.0 | 48.2<br>-53.7 | 53.6<br>-59.7 |
| 25 Feet Double Story            | Single 9' x 7'  | 20.1<br>-22.7   | 21.9<br>-24.7 | 25.8<br>-29.2 | 29.5<br>-33.4 | 34.1<br>-38.5 | 38.9<br>-44.0 | 44.1<br>-49.9 | 46.5<br>-52.5 | 48.9<br>-55.3 | 54.7<br>-61.8 | 60.8<br>-68.7 |
|                                 | Double 16' x 7' | 19.2<br>-21.4   | 21.0<br>-23.4 | 24.7<br>-27.6 | 28.3<br>-31.5 | 32.6<br>-36.4 | 37.3<br>-41.6 | 42.2<br>-47.1 | 44.5<br>-49.6 | 46.8<br>-52.2 | 52.4<br>-58.4 | 58.2<br>-64.9 |
| Equivalent Nominal Wind Speed → |                 | 89 MPH  | 93 MPH        | 101 MPH       | 108 MPH       | 116 MPH       | 124 MPH       | 132 MPH       | 136 MPH       | 139 MPH       | 147 MPH       | 155 MPH       |

\*Broward County is 170 MPH, Exposure C for most residential buildings. \*\*Miami-Dade County is 175 MPH, Exposure C for most residential buildings.

The design pressures listed are the minimum required. Recommended WINDCODE® levels typically meet or exceed the required design pressures.

MPH = miles per hour PSF = pounds per square foot

| WINDCODE® “W” RATING GUIDE |         |         |         |         |         |         |          |           |         |         |         |
|----------------------------|---------|---------|---------|---------|---------|---------|----------|-----------|---------|---------|---------|
| EXPOSURE B                 |         |         |         |         |         |         |          |           |         |         |         |
| Structural Type            | 115 MPH | 120 MPH | 130 MPH | 140 MPH | 150 MPH | 160 MPH | 170 MPH  | 180 MPH   | 190 MPH | 200 MPH |         |
| One Story                  | W1      | W2      | W3      | W3      | W4      | W5      | W5       | W6        | W6      | W7      |         |
| Two Story                  | W1      | W2      | W3      | W3      | W4      | W5      | W5       | W6        | W6      | W7      |         |
| EXPOSURE C                 |         |         |         |         |         |         |          |           |         |         |         |
| Structural Type            | 115 MPH | 120 MPH | 130 MPH | 140 MPH | 150 MPH | 160 MPH | 170* MPH | 175** MPH | 180 MPH | 190 MPH | 200 MPH |
| One Story                  | W2      | W3      | W3      | W4      | W5      | W5/W6   | W6/W7    | W6/W7     | W7      | W7      | W8      |
| Two Story                  | W3      | W3      | W4      | W5      | W5/W6   | W6      | W6/W7    | W7/W8     | W7/W8   | W8      | W9      |
| EXPOSURE D                 |         |         |         |         |         |         |          |           |         |         |         |
| Structural Type            | 115 MPH | 120 MPH | 130 MPH | 140 MPH | 150 MPH | 160 MPH | 170 MPH  | 175 MPH   | 180 MPH | 190 MPH | 200 MPH |
| One Story                  | W3      | W3/W4   | W4/W5   | W5      | W6      | W6      | W7       | W7/W8     | W7/W8   | W8      | W9      |
| Two Story                  | W3/W4   | W4/W5   | W4/W5   | W5/W6   | W6      | W7/W8   | W7/W8    | W8        | W8      | W9      | W9      |

\*Broward County is 170 MPH, Exposure C for most residential buildings. \*\*Miami-Dade County is 175 MPH, Exposure C for most residential buildings.

MPH = miles per hour



# WINDCODE® GARAGE DOORS

## STORM READY® – NO POSTS, PINS OR EXTRA SETUP. JUST CLOSE AND LOCK YOUR DOOR.


### WINDCODE® BENEFITS

- No attachments to the floor or structure required
- No extra posts, pins, parts or setup necessary
- Storm ready, simply close and lock your door

#### STANDARD GARAGE DOOR



#### WINDCODE® GARAGE DOORS

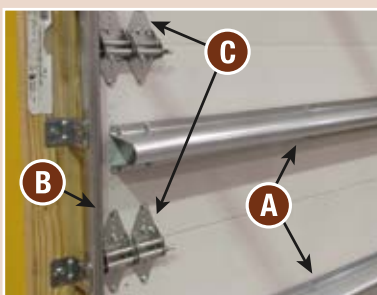

- A** Patented T-Strut design strengthens door
- B** Heavy-duty commercial grade track provides additional strength and durability
- C** Commercial-duty steel rollers and hardware withstand more severe wind pressures

### CLOPAY'S WINDCODE® GARAGE DOORS

Clopay's WINDCODE® garage doors are designed to help withstand high winds resulting from tropical storms and other strong wind-related weather events. This user-friendly system assists you in selecting the right garage door for your area and building structure.

### DESIGN OPTIONS

Clopay's WINDCODE® product offering has the widest range of panel styles, colors and window designs available today. Accent the design of your home while providing the protection you need against strong winds. Choose from various panel designs and Designer or Decorative windows for that extra curb appeal. Impact-resistant windows are available in many different colors and wind load levels.

### DESIGNED AND TESTED TO WITHSTAND STRONG WINDS

All Clopay's WINDCODE® doors have been designed and tested to meet various code requirements. Additional interior horizontal steel reinforcement along with increased hardware and springing components are installed so your door is ready when a storm hits. No posts or pins are required to secure your door if you are not there. Just lock your door.

## intellcore® insulation technology

### COOLER. QUIETER. STRONGER.

Garage doors featuring Intellcore® insulation technology represent the ultimate smart choice for homeowners. Clopay's Intellcore is a proprietary polyurethane foam that is injected into a garage door, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, while its industry-leading R-values (up to 20.4) provide year-round comfort and improved energy efficiency.



Look for the Intellcore® icon throughout this brochure on select door models.



### COOLER

Energy efficiency provides year-round comfort

### QUIETER

Dense insulation reduces noise by up to 16 decibels

### STRONGER

Enhanced strength resists everyday wear and tear



# CANYON RIDGE® collection

## HANDCRAFTED 5 OR 4-LAYER CONSTRUCTION



The Canyon Ridge® Collection provides the natural beauty of wood with the durability of an insulated steel door.

## STYLE AND CONSTRUCTION

- The Canyon Ridge® Limited Edition Series carriage house doors are constructed of an energy efficient, durable steel core and finished with full composite cladding and overlays that have the appearance of authentic wood doors.
- Limited Edition Series has 2" thick Intellicore® polyurethane (R-value 20.4).
- The Canyon Ridge® Ultra-Grain® Series features a steel base door coated with Ultra-Grain®, a durable, natural-looking, woodgrain paint finish.
- Ultra-Grain® Series has 2" thick polyurethane (R-value 18.4).

*Calculated door section R-value is in accordance with DASMA TDS-163.*

## MATERIAL DESIGN OPTIONS

### LIMITED EDITION SERIES

#### CLADDING



Clear Cypress Mahogany Pecky Cypress

#### OVERLAY



Clear Cypress Mahogany

### ULTRA-GRAIN® SERIES

#### OVERLAY



Clear Cypress

*Cladding is not present on Ultra-Grain® Series models.*

## COLOR OPTIONS

### LIMITED EDITION SERIES



Walnut Finish Dark Finish Medium Finish Whitewash Finish\* Primed

### ULTRA-GRAIN® SERIES



Ultra-Grain® Cypress Walnut Finish Ultra-Grain® Cypress Medium Finish


*\*Whitewash Finish available only on Mahogany Cladding and Overlays. Cladding and Overlays are finished in the same color. Door stain color will vary slightly within a door due to finishing process. Due to the printing process, colors may vary.*

## DOOR DESIGNS


### SERIES 1



Design 01



Design 11



Design 12



Design 13


### SERIES 2



Design 21



Design 22




Design 23



Design 24


### SERIES 3



Design 31




Design 32




Design 33



Design 34




Design 35



Design 36



Design 37



Design 38

*Door designs shown on Limited Edition Series. Design 01 not available on Ultra-Grain® Series.*

## WINDOW OPTIONS



REC11



REC13



REC14



SQ23



SQ24




ARCH1



ARCH3



ARCH4



ARCH5

*Windows not available on Design 01 and Series 3. Double door designs also available.*



Impact rated windows available.

## WINDCODE® AVAILABILITY CHART

| Common Door Widths                           |                    | W1  | W3        | W4                    | W5   | W6                              |                                      | W7        | W8                               |                                     |
|--|--------------------|---|-----------|-----------------------|--|---------------------------------|--------------------------------------|-----------|----------------------------------|-------------------------------------|
| Model CAN                                    | 8', 9' Wide Door   | S<br>+13/-15 PSF  | SELECT W4 | FS<br>+28/-29 PSF     | FS<br>+30/-32 PSF  | FDWS<br>+38/-44 PSF             |                                      | SELECT W8 | FDW<br>+54/-60 PSF               |                                     |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  | SELECT W4 | FS<br>+25.5/-25.5 PSF | FS<br>+30/-30 PSF  | C-CHANNEL<br>F<br>+37.5/-40 PSF | TAPERED STRUT<br>FDWS<br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br>FD<br>+46.6/-52 PSF | TAPERED STRUT<br>FDW<br>+46/-52 PSF |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | FS<br>+25.5/-25.5 PSF | FS<br>+30/-30 PSF  | C-CHANNEL<br>F<br>+37.5/-40 PSF | TAPERED STRUT<br>FDWS<br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br>FD<br>+46.6/-52 PSF | TAPERED STRUT<br>FDW<br>+46/-52 PSF |
|  | 18' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | F<br>+25/-25 PSF      | SELECT W6  | C-CHANNEL<br>F<br>+37/-37 PSF   | TAPERED STRUT<br>FDWS<br>+38/-42 PSF |           |                                  |                                     |
| S Standard Windows Available<br>Impact Rated |                    | W Patented Impact Windows Available<br>F Florida Approved |           |                       | D Dade County Approved<br>T Texas Department of Insurance Approved |                                 |                                      |           |                                  |                                     |

*For W6-W8 doors over 9' wide, add 2" to the door opening.*

# COACHMAN® collection



Coachman® Collection Design 12  
with REC13 Window Design

The Coachman® Collection gives your home classic elegance while complementing your home's architectural style.

## STYLE AND CONSTRUCTION

- Custom composite overlay with beveled coped edge and center groove creates a detailed carriage house look, available in four colors.
- Windows with complete overlay and true arch designs are available in double strength, insulated or obscure glass. Grilles are removable for ease of cleaning.
- Model CGU has 2" thick Intellicore® polyurethane (R-value 18.4).
- Model CG has 2" thick polystyrene (R-value 9.0).
- Model CD has 1-3/8" thick polystyrene (R-value 6.5).
- Insulated with a thermal break, between two layers of bonded steel.
- Coachman® Collection doors can be painted using a high-quality exterior latex paint. **IMPORTANT:** When painting your door, we require use of either a pre-approved paint or paints having a Light Reflective Value (LRV) of 38 or higher. Use of other paints will void the door's warranty. A list of pre-approved paints can be found at <http://info.garagedoors.com/lrv>.


Calculated door section R-value is in accordance with DASMA TDS-163.

## STEEL BASE / COMPOSITE OVERLAY COLORS



Overlay and base colors can be mixed to achieve desired look. Interior steel is always White. Due to the printing process, colors may vary.

## DOOR DESIGNS

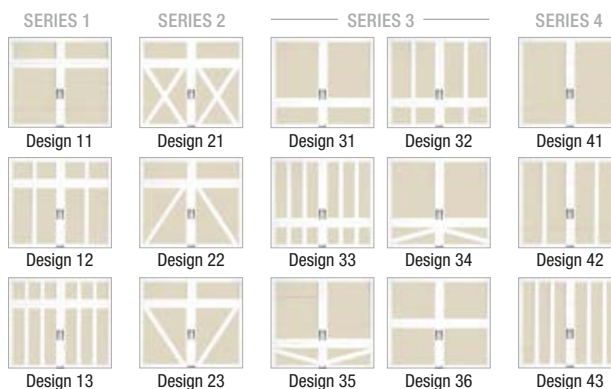

## WINDOW OPTIONS




## WINDCODE® AVAILABILITY CHART

| Common Door Widths |                    | W1                 | W3        | W4                 | W5                 | W6                                   | W7        | W8                                  |
|--------------------|--------------------|--------------------|-----------|--------------------|--------------------|--------------------------------------|-----------|-------------------------------------|
| Model CD           | 8', 9' Wide Door   | S<br>+13/-15 PSF   | SELECT W5 | SELECT W5          | FTS<br>+33/-37 PSF |                                      |           |                                     |
|                    | 10', 12' Wide Door | S<br>+12.5/-14 PSF | SELECT W4 | FTS<br>+25/-25 PSF |                    |                                      |           |                                     |
|                    | 16' Wide Door      | S<br>+12.5/-14 PSF | SELECT W4 | FTS<br>+25/-25 PSF |                    |                                      |           |                                     |
|                    | 18' Wide Door      | S<br>+12.5/-14 PSF |           |                    |                    |                                      |           |                                     |
| Model CG           | 8', 9' Wide Door   | SELECT W6          | SELECT W6 | SELECT W6          | SELECT W6          | FTS<br>+38/-42 PSF                   | SELECT W8 | FTD<br>+54/-60 PSF                  |
|                    | 10', 12' Wide Door | SELECT W5          | SELECT W5 | SELECT W5          | FTS<br>+30/-30 PSF | C-CHANNEL<br>FT<br>+37.5/-40 PSF     | SELECT W8 | C-CHANNEL<br>FD<br>+46.6/-52 PSF    |
|                    | 16' Wide Door      | SELECT W5          | SELECT W5 | SELECT W5          | FTS<br>+30/-30 PSF | C-CHANNEL<br>FT<br>+37.5/-40 PSF     | SELECT W8 | C-CHANNEL<br>FD<br>+46.6/-52 PSF    |
|                    | 18' Wide Door      | SELECT W6          | SELECT W6 | SELECT W6          | SELECT W6          | C-CHANNEL<br>FT<br>+37/-37 PSF       |           |                                     |
| Model CGU          | 8', 9' Wide Door   | S<br>+13/-15 PSF   | SELECT W4 | S<br>+25/-25 PSF   | SELECT W6          | FDWS<br>+38/-44 PSF                  | SELECT W8 | FDW<br>+54/-60 PSF                  |
|                    | 10', 12' Wide Door | S<br>+12.5/-14 PSF | SELECT W4 | S<br>+25/-25 PSF   | S<br>+30/-30 PSF   | TAPERED STRUT<br>FDWS<br>+38/-42 PSF | SELECT W8 | TAPERED STRUT<br>FDW<br>+46/-52 PSF |
|                    | 16' Wide Door      | S<br>+12.5/-14 PSF | SELECT W4 | S<br>+25/-25 PSF   | S<br>+30/-30 PSF   | TAPERED STRUT<br>FDWS<br>+38/-42 PSF | SELECT W8 | TAPERED STRUT<br>FDW<br>+46/-52 PSF |
|                    | 18' Wide Door      | S<br>+12.5/-14 PSF | SELECT W4 | +25/-25 PSF        | SELECT W6          | TAPERED STRUT<br>FDWS<br>+38/-42 PSF |           |                                     |

S Standard Windows Available      W Patented Impact Windows Available      D Dade County Approved  
 Impact Rated      F Florida Approved      T Texas Department of Insurance Approved

For W6-W8 doors over 9' wide, add 2" to the door opening.  
 For W1, Model CG is not available.

# AVANTE™ collection

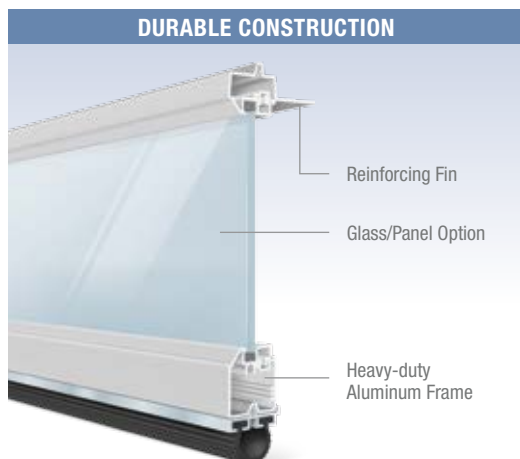

Avante™ is the perfect choice to modernize any home.

## STYLE AND CONSTRUCTION

- 2-1/8" aluminum frame provides a virtually maintenance-free, long-lasting door.
- Tempered glass, acrylic or solid aluminum panel options. Insulated glass is also available for increased energy efficiency (AVI model).
- Vinyl bottom weatherseal with retainer helps protect against the elements and is replaceable.
- Integral reinforcing fin provides increased strength and longevity.
- Heavy-duty steel ball bearing rollers with nylon tires provide quiet operation.

## DOOR DESIGNS



## HARDWARE



Attractive color-matched aluminum grip handles.

## FRAME/SOLID PANEL COLOR OPTIONS



Clear Aluminum (Anodized)




Standard White



Bronze (Painted)




Chocolate (Painted)



Bronze (Anodized)




Black (Anodized)



Dark Bronze (Anodized)



Ultra-Grain® Cherry Light Finish



Ultra-Grain® Cherry Dark Finish

Due to the anodizing process, color variation may occur. The use of "Bronze (Painted)" is recommended for a more consistent bronze finish color. Custom colors available.

## GLASS/PANEL OPTIONS



Clear Glass



Gray Tint




Bronze Tint




Mirrored Glass



Obscure Glass



White Laminate




Frosted



Clear Acrylic



Gray Acrylic



White Acrylic



Clear Polygal®



Bronze Polygal®



Clear Anodized



Ultra-Grain® Cherry Light Finish



Ultra-Grain® Cherry Dark Finish

## WINDCODE® AVAILABILITY CHART

| Common Door Widths   |                            | W1   | W3        | W4   | W5                                 |
|--|----------------------------|--|-----------|--|------------------------------------|
| Models AV/AVI  | 8', 9', 10', 12' Wide Door | <b>S</b><br>+16.5/-16.5 PSF                                    | SELECT W5 | SELECT W5  | <b>FS</b><br>+32/-32 PSF           |
|  | 14' Wide Door              | <b>S</b><br>+13.5/-13.5 PSF                                    | SELECT W5 | SELECT W5  | <b>FS</b><br>+30/-30 PSF           |
|  | 16' Wide Door              | SELECT W5  | SELECT W5 | SELECT W5  | <b>FS</b><br>+30/-30 PSF           |
|  | 18' Wide Door              | SELECT W5  | SELECT W5 | SELECT W5  | <b>C-CHANNEL FS</b><br>+30/-30 PSF |
| <b>S</b> Standard Windows Available<br><b>I</b> Impact Rated |                            | <b>W</b> Impact Windows Available<br><b>F</b> Florida Approved |           | <b>D</b> Dade County Approved<br><b>T</b> Texas Department of Insurance Approved |                                    |



# GALLERY® collection



Constructed of durable steel, this vintage style line is available in long or short grooved panel designs with various windows, colors and hardware options to create that one-of-a-kind look.

## STYLE AND CONSTRUCTION

- Hot-dipped galvanized steel skin with a baked-on primer and top coat helps ensure durability and long-lasting beauty.
- Intellicore® polyurethane or polystyrene insulation with R-values ranging from 18.4 to 6.3.
- Windows are standard with double strength clear glass and optional snap-in grilles. Other options include insulated glass, obscure with snap-in grilles and acrylic wrought iron designs.
- Section joints and bottom weatherseal in a corrosion-resistant aluminum retainer help seal out the elements.

*Calculated door section R-value is in accordance with DASMA TDS-163.*

## PANEL OPTIONS



Short Panel



Long Panel

## COLOR OPTIONS



*Due to the printing process, colors may vary.*

*\*Not available on all models. Complete color availability can be found on page 28.*

*\*Popular in select markets. Glacier White is a brighter white.*

*Ultra-Grain® is a faux woodgrain paint coating offering the beauty of stained wood without the upkeep.*

*Ultra-Grain® doors have stucco texture.*

## PANEL DETAIL

Deep-embossed panels with woodgrain or stucco (Ultra-Grain® only) surface texture improve appearance close-up and from the curb.



## MODEL SPECIFICATIONS

| MODEL        | GD2SU           | GD2LU           | GD1SU               | GD1LU               | GD2SP          | GD2LP          | GD1SP              | GD1LP              |
|--------------|-----------------|-----------------|---------------------|---------------------|----------------|----------------|--------------------|--------------------|
| Panel Style  | Short           | Long            | Short               | Long                | Short          | Long           | Short              | Long               |
| Insulation   | 2" Polyurethane | 2" Polyurethane | 1-3/8" Polyurethane | 1-3/8" Polyurethane | 2" Polystyrene | 2" Polystyrene | 1-3/8" Polystyrene | 1-3/8" Polystyrene |
| Construction | 3-Layer         | 3-Layer         | 3-Layer             | 3-Layer             | 3-Layer        | 3-Layer        | 3-Layer            | 3-Layer            |
| R-value      | 18.4            | 18.4            | 12.9                | 12.9                | 9.0            | 9.0            | 6.5                | 6.5                |




# GALLERY® collection



## WINDOW OPTIONS

### GLASS

\*Complements Clopay Entry Door glass.



Plain Short




Plain Long




ARCH1 Plain



ARCH2 Plain



Short with Rectangular Grilles



Long with Rectangular Grilles



ARCH1 with Vertical Grilles



ARCH2 with Vertical Grilles



Short with Square Grilles




Long with Square Grilles



ARCH1 with Grilles




ARCH2 with Grilles




Ashford® Short\*



Ashford® Long\*



Kristin® Short\*



Kristin® Long\*



Trenton® Short\*



Trenton® Long\*



Clayton™ Short\*



Clayton™ Long\*

### ACRYLIC



Wrought Iron Short\*



Wrought Iron Long\*



Wrought Iron Arch\*

Additional double width door designs available. Double strength glass is standard.























































Long windows are available on short panel doors and short windows are available on long panel doors. Some limitations may apply based on W-Level. Contact your Clopay Dealer for details.

 Impact rated windows available

## MODEL SPECIFICATIONS

| MODEL        | GD4S          | GD4L          | GD4SV       | GD4LV       | GD5S          | GD5SV       |
|--------------|---------------|---------------|-------------|-------------|---------------|-------------|
| Panel Style  | Short         | Long          | Short       | Long        | Short         | Short       |
| Insulation   | Non-Insulated | Non-Insulated | Polystyrene | Polystyrene | Non-Insulated | Polystyrene |
| Construction | 1-Layer       | 1-Layer       | 2-Layer     | 2-Layer     | 1-Layer       | 2-Layer     |
| R-value      | N/A           | N/A           | 6.3         | 6.3         | N/A           | 6.3         |

# GALLERY® collection

| WINDCODE® AVAILABILITY CHART |                    |                           |                          |  |                          |   |   |           |   |  |
|------------------------------|--------------------|---------------------------|--------------------------|--|--------------------------|---|---|-----------|---|--|
| Common Door Widths           |                    | W1                        | W3                       | W4   | W5                       | W6  |   | W7        | W8  |  |
| Model GD2SU                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                |  <b>FS</b><br>+28/-29 PSF       | SELECT W6                |  <b>FTWS</b><br>+38/-44 PSF                  |   | SELECT W8 |  <b>FW</b><br>+54/-60 PSF                  |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF   | <b>FS</b><br>+30/-30 PSF |  <b>FTWS</b><br>+38/-42 PSF                  |   | SELECT W8 | TAPERED STRUT<br> <b>FW</b><br>+46/-52 PSF |  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF   | <b>FS</b><br>+30/-30 PSF |  <b>FTWS</b><br>+38/-42 PSF                  |   | SELECT W8 | TAPERED STRUT<br> <b>FW</b><br>+46/-52 PSF |  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>F</b><br>+25/-25 PSF        | SELECT W6                | TAPERED STRUT<br> <b>FTWS</b><br>+38/-42 PSF |   |           |   |  |
| Model GD2LU                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                |  <b>FS</b><br>+28/-29 PSF       | SELECT W6                |  <b>FTWS</b><br>+38/-44 PSF                  |   | SELECT W8 |  <b>FW</b><br>+54/-60 PSF                  |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF   | <b>FS</b><br>+30/-30 PSF |  <b>FTWS</b><br>+38/-42 PSF                  |   | SELECT W8 | TAPERED STRUT<br> <b>FW</b><br>+46/-52 PSF |  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF   | <b>FS</b><br>+30/-30 PSF |  <b>FTWS</b><br>+38/-42 PSF                  |   | SELECT W8 | TAPERED STRUT<br> <b>FW</b><br>+46/-52 PSF |  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>F</b><br>+25/-25 PSF        | SELECT W6                | TAPERED STRUT<br> <b>FTWS</b><br>+38/-42 PSF |   |           |   |  |
| Model GD1SU                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>S</b><br>+30/-32 PSF  |   |   |           |   |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |                          |  |                          |   |   |           |   |  |
| Model GD1LU                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>S</b><br>+30/-32 PSF  |   |   |           |   |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |                          |  |                          |   |   |           |   |  |
| Model GD2SP                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                |  <b>FS</b><br>+28/-29 PSF     | SELECT W6                |  <b>FTWS</b><br>+38/-44 PSF                |   | SELECT W8 |  <b>FDW</b><br>+54/-60 PSF               |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF | <b>FS</b><br>+30/-30 PSF | C-CHANNEL<br> <b>FS</b><br>+37/-40 PSF     | TAPERED STRUT<br> <b>FTDWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br> <b>FD</b><br>+46.6/-52 PSF | TAPERED STRUT<br> <b>FDW</b><br>+46/-52 PSF |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF | <b>FS</b><br>+30/-30 PSF | C-CHANNEL<br> <b>FS</b><br>+37/-40 PSF     | TAPERED STRUT<br> <b>FTDWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br> <b>FD</b><br>+46.6/-52 PSF | TAPERED STRUT<br> <b>FDW</b><br>+46/-52 PSF |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>F</b><br>+25/-25 PSF      | SELECT W6                | C-CHANNEL<br> <b>F</b><br>+37/-37 PSF      | TAPERED STRUT<br> <b>FTWS</b><br>+38/-42 PSF  |           |   |  |
|                              | 20'2" Wide Door    | SELECT W5                 | SELECT W5                | SELECT W5  | <b>FS</b><br>+30/-33 PSF |   |   |           |   |  |
| Model GD2LP                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                |  <b>FS</b><br>+28/-29 PSF     | SELECT W6                |  <b>FTWS</b><br>+38/-44 PSF                |   | SELECT W8 |  <b>FDW</b><br>+54/-60 PSF               |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF | <b>FS</b><br>+30/-30 PSF | C-CHANNEL<br> <b>FS</b><br>+37/-40 PSF     | TAPERED STRUT<br> <b>FTDWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br> <b>FD</b><br>+46.6/-52 PSF | TAPERED STRUT<br> <b>FDW</b><br>+46/-52 PSF |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>FS</b><br>+25.5/-25.5 PSF | <b>FS</b><br>+30/-30 PSF | C-CHANNEL<br> <b>FS</b><br>+37/-40 PSF     | TAPERED STRUT<br> <b>FTDWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br> <b>FD</b><br>+46.6/-52 PSF | TAPERED STRUT<br> <b>FDW</b><br>+46/-52 PSF |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                |  <b>F</b><br>+25/-25 PSF      | SELECT W6                | C-CHANNEL<br> <b>F</b><br>+37/-37 PSF      | TAPERED STRUT<br> <b>FTWS</b><br>+38/-42 PSF  |           |   |  |
|                              | 20'2" Wide Door    | SELECT W5                 | SELECT W5                | SELECT W5  | <b>FS</b><br>+30/-33 PSF |   |   |           |   |  |
| Model GD1SP                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>FS</b><br>+30/-32 PSF |   |   |           |   |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |                          |  |                          |   |   |           |   |  |
| Model GD1LP                  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>FS</b><br>+30/-32 PSF |   |   |           |   |  |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5  | <b>F</b><br>+30/-30 PSF  |   |   |           |   |  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |                          |  |                          |   |   |           |   |  |

# GALLERY® collection

| WINDCODE® AVAILABILITY CHART                 |                    |                     |           |   |   |  |                                    |  |                  |                    |
|--|--------------------|---------------------|-----------|---|---|--|------------------------------------|--|------------------|--------------------|
| Common Door Widths                           |                    | W1                  | W3        | W4  | W5  |  | W6                                 |  | W7               | W8                 |
| GD4S 24 Gauge Pan Short                      | 8', 9' Wide Door   | S<br>+13/-15 PSF    | SELECT W4 | FTS<br>+25/-25 PSF  | FTS<br>+30/-32 PSF                        |  | FTW <sup>1</sup> S*<br>+38/-44 PSF |  | SELECT W8        | FDW<br>+50/-58 PSF |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  | SELECT W4 | FTS*<br>+25/-25 PSF                                       | FTS*<br>+30/-30 PSF                       |  | C-CHANNEL<br>FTS*<br>+37/-41 PSF   | TAPERED STRUT<br>FWS*<br>+38/-42 PSF                               | SELECT W8        | FDW<br>+46/-52 PSF |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | FTS*<br>+25/-25 PSF                                       | FTS*<br>+30/-30 PSF                       |  | C-CHANNEL<br>FTS*<br>+37/-41 PSF   | TAPERED STRUT<br>FWS*<br>+38/-42 PSF                               | SELECT W8        | FDW<br>+46/-52 PSF |
|  | 18' Wide Door      | S*<br>+12.5/-14 PSF | SELECT W4 | FTS*<br>+25/-25 PSF                                       | SELECT W6                                 |  | FS*<br>+37/-39 PSF                 |  |                  |                    |
| GD4SV 24 Gauge Insulated Short               | 8', 9' Wide Door   | S<br>+13/-15 PSF    | SELECT W4 | FTS<br>+25/-25 PSF  | FTS<br>+30/-32 PSF                        |  |                                    |  |                  |                    |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  | SELECT W4 | FTS*<br>+25/-25 PSF                                       | FTS*<br>+30/-30 PSF                       |  |                                    |  |                  |                    |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | FTS*<br>+25/-25 PSF                                       | FTS*<br>+30/-30 PSF                       |  |                                    |  |                  |                    |
|  | 18' Wide Door      | S*<br>+12.5/-14 PSF | SELECT W4 | FTS*<br>+25/-25 PSF                                       |   |  |                                    |  |                  |                    |
| GD4L 24 Gauge Pan Long                       | 8', 9' Wide Door   | S<br>+13/-15 PSF    | SELECT W4 | FTS<br>+25/-25 PSF  | SELECT W6                                 |  | FTW <sup>1</sup> S*<br>+38/-44 PSF |  |                  |                    |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  | SELECT W4 | FTS*<br>+25/-25 PSF                                       | SELECT W6                                 |  | C-CHANNEL<br>FTS*<br>+37/-41 PSF   | TAPERED STRUT<br>FS*<br>+38/-42 PSF                                |                  |                    |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | FTS*<br>+25/-25 PSF                                       | SELECT W6                                 |  | C-CHANNEL<br>FTS*<br>+37/-41 PSF   | TAPERED STRUT<br>FS*<br>+38/-42 PSF                                |                  |                    |
|  | 18' Wide Door      | S*<br>+12.5/-14 PSF | SELECT W4 | FTS*<br>+25/-25 PSF                                       |   |  |                                    |  |                  |                    |
| GD4LV 24 Gauge Insulated Long                | 8', 9' Wide Door   | S<br>+13/-15 PSF    | SELECT W4 | FTS<br>+25/-25 PSF  |   |  |                                    |  |                  |                    |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  |           |   |   |  |                                    |  |                  |                    |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  |           |   |   |  |                                    |  |                  |                    |
|  | 18' Wide Door      |                     |           |   |   |  |                                    |  |                  |                    |
| GD5S 25 Gauge Pan Short                      | 8', 9' Wide Door   | S<br>+13/-15 PSF    | SELECT W4 | FS<br>+25/-32 PSF   | FS<br>+30/-32 PSF                         |  | FS*<br>+38/-42 PSF                 |  | F<br>+42/-48 PSF |                    |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  | SELECT W4 | FS*<br>+24/-24.5 PSF                                      | GD5S<br>FS*<br>+30/-30 or<br>+32/-32 PSF  | TAPERED STRUT<br>GD5SSP<br>F*<br>+32/-37 PSF | C-CHANNEL<br>FS*<br>+37/-41 PSF    | TAPERED STRUT<br>FS*<br>+36/-42 PSF                                |                  |                    |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | FS*<br>+24/-24.5 PSF                                      | GD5S<br>FS*<br>+30/-30 or<br>+32/-32 PSF  | TAPERED STRUT<br>GD5SSP<br>F*<br>+32/-37 PSF | C-CHANNEL<br>FS*<br>+37/-41 PSF    | TAPERED STRUT<br>FS*<br>+36/-42 PSF                                |                  |                    |
|  | 18' Wide Door      | S*<br>+12.5/-14 PSF | SELECT W4 | FS*<br>+25/-27 PSF  | SELECT W6                                 |  | C-CHANNEL<br>FS*<br>+37/-37 PSF    | TAPERED STRUT<br>FS*<br>+36/-42 PSF                                |                  |                    |
| GD5SV 25 Gauge Insulated Short               | 8', 9' Wide Door   | S<br>+13/-15 PSF    | SELECT W4 | FS<br>+25/-32 PSF   | FS<br>+30/-32 PSF                         |  |                                    |  |                  |                    |
|  | 10', 12' Wide Door | S<br>+12.5/-14 PSF  | SELECT W4 | FS*<br>+24/-24.5 PSF                                      | GD5SV<br>FS*<br>+30/-30 or<br>+32/-32 PSF | TAPERED STRUT<br>GD5SPV<br>F*<br>+32/-37 PSF |                                    |  |                  |                    |
|  | 16' Wide Door      | S<br>+12.5/-14 PSF  | SELECT W4 | FS*<br>+24/-24.5 PSF                                      | GD5SV<br>FS*<br>+30/-30 or<br>+32/-32 PSF | TAPERED STRUT<br>GD5SPV<br>F*<br>+32/-37 PSF |                                    |  |                  |                    |
|  | 18' Wide Door      | S*<br>+12.5/-14 PSF | SELECT W4 | FS*<br>+25/-27 PSF  |   |  |                                    |  |                  |                    |
| S Standard Windows Available<br>Impact Rated |                    |                     |           | W Patented Impact Windows Available<br>F Florida Approved |   |  |                                    | D Dade County Approved<br>T Texas Department of Insurance Approved |                  |                    |

For W6-W8 doors over 9' wide, add 2" to the door opening.  
 For W6, Model GD4S 18' wide doors are available only at 7' high.  
 Standard windows are not available in Texas.

\*Long window availability is limited due to reinforcement requirements.  
 \*\*Impact windows not Miami-Dade approved at this time.  
 †Impact windows are not available in Texas.



# MODERN STEEL™ collection



Modern Steel™ Collection garage doors complement contemporary and mid-century modern home styles. Doors are available with or without windows and with solid or grooved panels. All are available in multiple paint and Ultra-Grain® finishes to create the perfect look for your home.

## STYLE AND CONSTRUCTION

- Intellicore® polyurethane or polystyrene insulation with R-values ranging from 18.4 to 6.5.
- Modern Flush and Grooved panels with a textured steel surface improve appearance close-up and from the curb.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant aluminum retainer helps seal out the elements.
- Prepainted interior steel backing creates a clean, finished appearance.

*Calculated door section R-value is in accordance with DASMA TDS-163.*

## COLOR OPTIONS




*\*Not available on all models.*

*Due to the printing process, colors may vary.*

*Complete color availability can be found on page 28.*

*†Popular in select markets, Glacier White is a brighter white.*


## PANEL OPTIONS



Modern Flush (9202, 9201, 9132, 9131, 4302, 4301, 4132, 4051, 4F)



Modern Grooved (9205, 4305)



Modern Flush with Contemporary Windows (9208, 9138, 4308, 4138)



Modern Grooved with Contemporary Windows (9209, 9139, 4309)


## MODEL SPECIFICATIONS

| MODELS         | 9202, 9201                   | 9208†                                  | 9205                         | 9209†                                    | 9132, 9131          | 9138†                                  | 9139†                                    |
|----------------|------------------------------|--|------------------------------|--|---------------------|--|--|
| Panel Style    | Modern Flush                 | Modern Flush with Contemporary Windows | Modern Grooved               | Modern Grooved with Contemporary Windows | Modern Flush        | Modern Flush with Contemporary Windows | Modern Grooved with Contemporary Windows |
| Steel Texture* | Woodgrain                    | Stucco                                 | Stucco                       | Stucco                                   | Woodgrain           | Stucco                                 | Stucco                                   |
| Insulation     | 2" Intellicore® Polyurethane | 2" Intellicore® Polyurethane           | 2" Intellicore® Polyurethane | 2" Intellicore® Polyurethane             | 1-3/8" Polyurethane | 1-3/8" Polyurethane                    | 1-3/8" Polyurethane                      |
| Construction   | 3-Layer                      | 3-Layer                                | 3-Layer                      | 3-Layer                                  | 3-Layer             | 3-Layer                                | 3-Layer                                  |
| R-value        | 18.4                         | 18.4                                   | 18.4                         | 18.4                                     | 12.9                | 12.9                                   | 12.9                                     |

*\*Exterior steel surface on an Ultra-Grain® painted door has a woodgrain texture on Modern Steel™ Collection doors.*

*†Models available only with Plain, Rectangular Grille and Square Grille Windows. Obscure, Frosted and Narrow Reed glass available.*

# MODERN STEEL™ collection

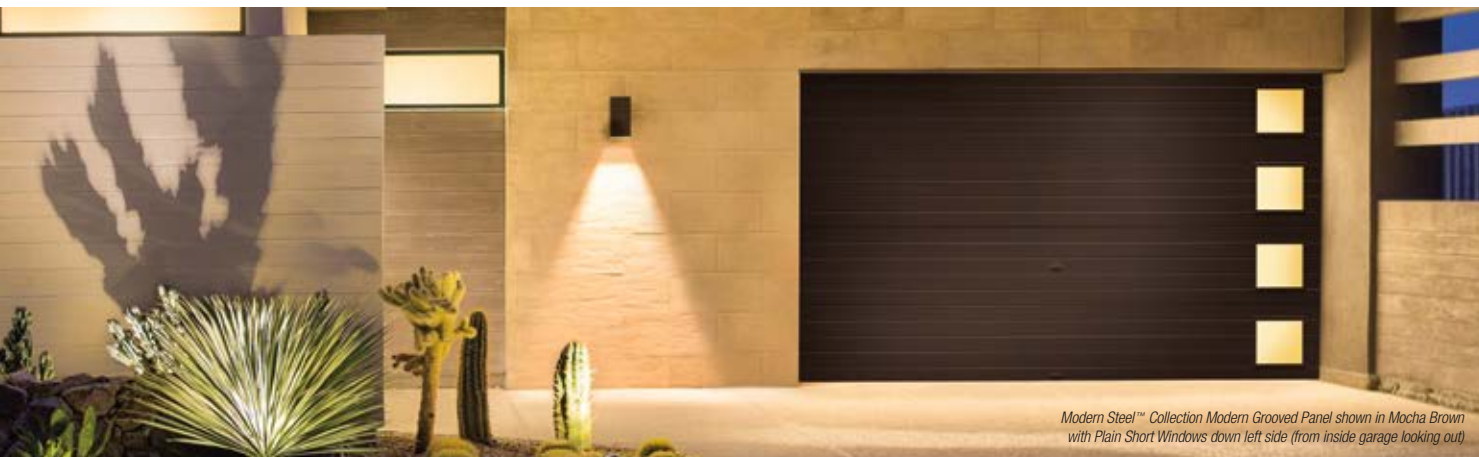


Modern Steel™ Collection Modern Grooved Panel shown in Mocha Brown with Plain Short Windows down left side (from inside garage looking out)

## CONTEMPORARY WINDOW ORIENTATION


When ordering contemporary window configurations please reference the examples provided to describe your desired window positions.

**Note: Window configurations are described from inside the garage looking out.**

Example: Windows down right side (from inside garage looking out)

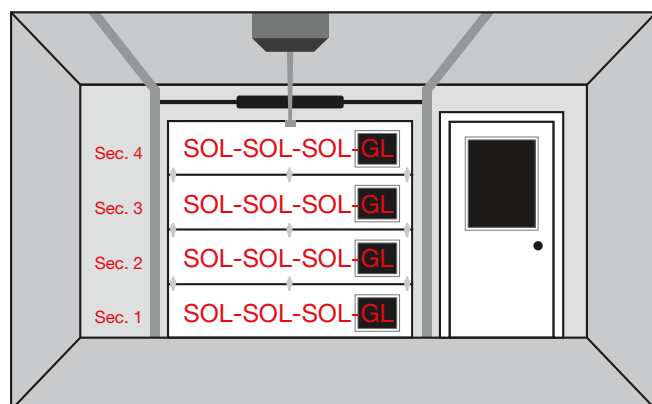

View from Inside Garage

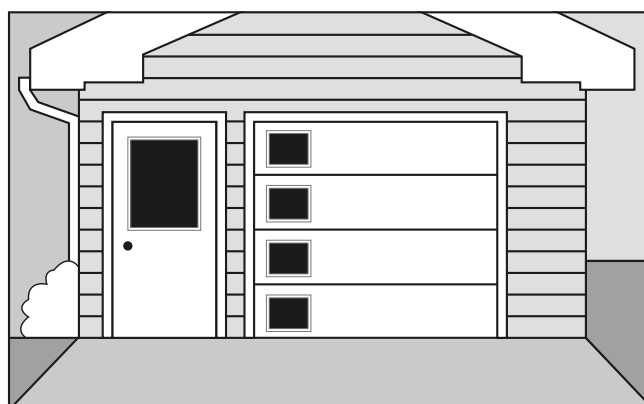

View from Outside Garage

For popular contemporary window configurations and window options see pages 14–15.

## MODEL SPECIFICATIONS

| MODELS        | 4302, 4302     | 4308†                                  | 4305           | 4309†                                    | 4132, 4051         | 4138†                                  | 4F            |
|---------------|----------------|--|----------------|--|--------------------|--|---------------|
| Panel Style   | Modern Flush   | Modern Flush with Contemporary Windows | Modern Grooved | Modern Grooved with Contemporary Windows | Modern Flush       | Modern Flush with Contemporary Windows | Modern Flush  |
| Steel Texture | Woodgrain      | Stucco                                 | Stucco         | Stucco                                   | Woodgrain          | Stucco                                 | Woodgrain     |
| Insulation    | 2" Polystyrene | 2" Polystyrene                         | 2" Polystyrene | 2" Polystyrene                           | 1-3/8" Polystyrene | 1-3/8" Polystyrene                     | Non-Insulated |
| Construction  | 3-Layer        | 3-Layer                                | 3-Layer        | 3-Layer                                  | 3-Layer            | 3-Layer                                | 1-Layer       |
| R-value       | 9.0            | 9.0                                    | 9.0            | 9.0                                      | 6.5                | 6.5                                    | N/A           |

# MODERN STEEL™ collection

## POPULAR CONTEMPORARY WINDOW CONFIGURATIONS

Contemporary window configurations are not limited to just windows down one side of the door. Multiple window locations, and even doors with windows in all panel locations, and all sections are options.


Images below are illustrations from outside garage. Note: Codes listed below are from inside of garage looking out, per note on previous page.

Examples below show window location. SOL=Solid Location, GL=Glazed (Window) Location. Sections are numbered from the floor up.


- These window configurations are only available on Models 9209, 9208, 9139, 9138, 4309, 4308 and 4138 with 24" and 21" sections.
- For doors with multiple window sections, window locations must be the same in every section.
- For doors with glass, all glass will be tempered.

See your Clopay Dealer for details.


## SHORT WINDOW CONFIGURATIONS



SOL-SOL-SOL-GL  
Sections: 1, 2, 3, 4

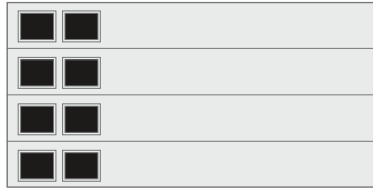


SOL-SOL-SOL-SOL-SOL-SOL-GL-GL  
Sections: 1, 2, 3, 4




GL-SOL-SOL-SOL  
Sections: 1, 2, 3, 4




GL-GL-SOL-SOL-SOL-SOL-SOL-SOL  
Sections: 1, 2, 3, 4




GL-SOL-SOL-GL  
Sections: 3, 4

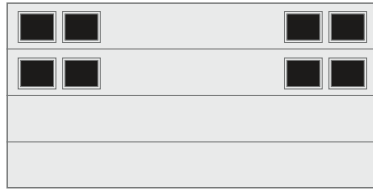

GL-GL-SOL-SOL-SOL-SOL-GL-GL  
Sections: 3, 4




GL-GL-GL-GL  
Sections: 1, 2, 3, 4

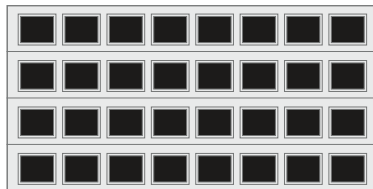

GL-GL-GL-GL-GL-GL-GL-GL  
Sections: 1, 2, 3, 4


## LONG WINDOW CONFIGURATIONS



SOL-GL  
Sections: 1, 2, 3, 4



SOL-SOL-SOL-GL  
Sections: 1, 2, 3, 4



GL-SOL  
Sections: 1, 2, 3, 4




GL-SOL-SOL-SOL  
Sections: 1, 2, 3, 4




GL-GL  
Sections: 3, 4



GL-GL-GL-GL  
Sections: 3, 4



GL-GL  
Sections: 1, 2, 3, 4

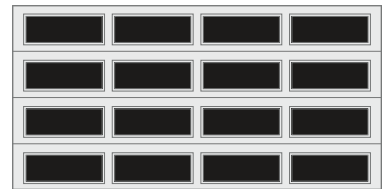

GL-GL-GL-GL  
Sections: 1, 2, 3, 4

## IMPACT GLASS OPTIONS



Clear Polycarbonate



Bronze Polycarbonate



Matte Polycarbonate



Pebble Polycarbonate



# MODERN STEEL™ collection

## WINDOW OPTIONS

### PALLADIAN™ SERIES



Palladian™ Short with Grilles



Palladian™ Short



Palladian™ Long with Grilles



Palladian™ Long

### WROUGHT IRON SERIES



Tuscany Short



Orleans Short



Tuscany Long



Orleans Long

### BRILLIANCE® SERIES



Solitaire Short



Marquise Short



Trillian Short



Solitaire Long



Marquise Long



Trillian Long

### LEADED SERIES (GLASS)




Trenton® Short



Roselle® Short



Ashford® Short



Carlisle® Short




Kristin® Short



Trenton® Long



Roselle® Long



Ashford® Long




Carlisle® Long




Kristin® Long

### ARCHITECTURAL SERIES



Plain Short



Short with Rectangular Grilles



Short with Square Grilles



Ashford® Short\*



Trenton® Short\*



Plain Long



Long with Rectangular Grilles



Long with Square Grilles



Ashford® Long\*



Trenton® Long\*



ARCH1 Plain



ARCH1 with Vertical Grilles



ARCH1 with Grilles



Kristin® Short\*



Clayton™ Short\*



ARCH2 Plain



ARCH2 with Vertical Grilles



ARCH2 with Grilles



Kristin® Long\*



Clayton™ Long\*

### PLAIN SERIES



Plain Short



Plain Long

### SNAP-IN SERIES



Cathedral 507



Colonial 509



Sunset 501 (4, 6 or 8 panels across)



Sunset 502 (3, 6 or 9 panels across)



Sunset 506 (5 or 10 panels across)



Sunset 504 (7 panels across only)



Sunset 505 (8 panels across only)



Cathedral 607



Stockton 612



Madison 611



Sunset 601 (2, 3, 4 or 5 long panels across)



Sunset 603 (2 or 4 long panels across)



Sunset 605 (4 long panels across)

Plain, Snap-In, Wrought Iron, Brilliance® and Leaded Series windows are available on select Modern Steel™ Collection doors.

\*Complements Clopay Entry Door glass.

### ACRYLIC



Wrought Iron Short\*



Wrought Iron Long\*








































Wrought Iron Arch\*

Additional double width door designs available. Double strength glass is standard.

Impact rated windows available

Architectural Series windows are not available on Modern Steel™ Collection Models 4051 and 4F.

# MODERN STEEL™ collection

| WINDCODE® AVAILABILITY CHART |                    |                           |           |                          |                               |   |   |   |           |   |  |    |
|------------------------------|--------------------|---------------------------|-----------|--------------------------|-------------------------------|---|---|---|-----------|---|--|----|
| Common Door Widths           |                    | W1                        | W2        | W3                       | W4                            | W5  | W6  |   | W7        | W8  |  | W9 |
| Models 9202, 9205            | 8', 9' Wide Door   | <b>S</b><br>+13/–15 PSF   | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   |  <b>FTWS*</b><br>+38/–44 PSF                     |   | SELECT W8 |  <b>FW*</b><br>+54/–60 PSF                     |  |    |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   | TAPERED STRUT<br> <b>FTWS*</b><br>+38/–42 PSF    |   | SELECT W8 | TAPERED STRUT<br> <b>FW*</b><br>+46/–52 PSF    |  |    |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   | TAPERED STRUT<br> <b>FTWS*</b><br>+38/–42 PSF    |   | SELECT W8 | TAPERED STRUT<br> <b>FW*</b><br>+46/–52 PSF    |  |    |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   | TAPERED STRUT<br> <b>FTWS*</b><br>+38/–42 PSF    |   | SELECT W8 |   |  |    |
| Models 9208, 9209            | 8', 9' Wide Door   | <b>S</b><br>+13/–15 PSF   | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   |  <b>FWS</b><br>+38/–42 PSF                       |   | SELECT W8 |  <b>FWS</b><br>+54/–62 PSF                     |  |    |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   |  <b>FWS</b><br>+38/–42 PSF                       |   | SELECT W8 | U-BAR<br> <b>FWS</b><br>+50/–56 PSF            |  |    |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   |  <b>FWS</b><br>+38/–42 PSF                       |   | SELECT W8 |  <b>FWS</b><br>+46/–52 PSF                     |  |    |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/–14 PSF |           |                          |                               |   |   |   |           |   |  |    |
| Model 9201                   | 8', 9' Wide Door   | <b>S</b><br>+13/–15 PSF   | SELECT W4 | SELECT W4                | <b>FTS</b><br>+28/–29 PSF     | <b>FS</b><br>+30/–32 PSF  |  <b>FTWS</b><br>+38/–44 PSF                      |   | SELECT W8 |  <b>FTW</b><br>+48/–60 PSF                     |  |    |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/–14 PSF | SELECT W4 | SELECT W4                | <b>FTS</b><br>+25.5/–25.5 PSF | SELECT W6   | U-BAR<br> <b>FWS</b><br>+37/–40 PSF              | TAPERED STRUT<br> <b>FTWS</b><br>+38/–42 PSF   | SELECT W8 | C-CHANNEL<br> <b>FW</b><br>+46.6/–52 PSF     | TAPERED STRUT<br> <b>FTW</b><br>+46/–52 PSF   |    |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W4 | SELECT W4                | <b>FTS</b><br>+25.5/–25.5 PSF | SELECT W6   | U-BAR<br> <b>FWS</b><br>+37/–40 PSF              | TAPERED STRUT<br> <b>FTWS</b><br>+38/–42 PSF   | SELECT W8 | C-CHANNEL<br> <b>FW</b><br>+46.6/–52 PSF     | TAPERED STRUT<br> <b>FTW</b><br>+46/–52 PSF   |    |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W4 | SELECT W4                | <b>FTS</b><br>+24/–24.5 PSF   | SELECT W6   | C-CHANNEL<br> <b>FWS</b><br>+37/–37 PSF        | TAPERED STRUT<br> <b>FTWS</b><br>+38/–42 PSF | SELECT W8 | C-CHANNEL<br> <b>F</b><br>+46/–50 PSF      | TAPERED STRUT<br> <b>FTW</b><br>+46/–50 PSF |    |
| Models 9132, 9131            | 8', 9' Wide Door   | <b>S</b><br>+13/–15 PSF   | SELECT W3 | <b>FS</b><br>+20/–20 PSF | <b>FS</b><br>+25/–28 PSF      |  <b>FWS</b><br>+33/–37 PSF | <b>FS</b><br>+37/–37 PSF  |   |           |   |  |    |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/–14 PSF | SELECT W3 | <b>FS</b><br>+20/–21 PSF | <b>FS</b><br>+24/–26 PSF      |  <b>FS</b><br>+32/–32 PSF  |   |   |           |   |  |    |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W3 | <b>FS</b><br>+20/–21 PSF | <b>FS</b><br>+24/–26 PSF      |  <b>FS</b><br>+32/–32 PSF  |   |   |           |   |  |    |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W4 | SELECT W4                | <b>FS</b><br>+24/–26 PSF      |   |   |   |           |   |  |    |
| Models 9138, 9139            | 8', 9' Wide Door   | <b>S</b><br>+13/–15 PSF   |           |                          |                               |   |   |   |           |   |  |    |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/–14 PSF |           |                          |                               |   |   |   |           |   |  |    |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/–14 PSF |           |                          |                               |   |   |   |           |   |  |    |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/–14 PSF |           |                          |                               |   |   |   |           |   |  |    |
| Models 4302, 4305            | 8', 9' Wide Door   | <b>S</b><br>+13/–15 PSF   | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   |  <b>FTWS†</b><br>+38/–44 PSF                   |   | SELECT W8 |  <b>FDW†</b><br>+54/–60 PSF                  |  |    |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   | TAPERED STRUT<br> <b>FTDWS†</b><br>+38/–42 PSF |   | SELECT W8 | TAPERED STRUT<br> <b>FDW†</b><br>+46/–52 PSF |  |    |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   | TAPERED STRUT<br> <b>FTDWS†</b><br>+38/–42 PSF |   | SELECT W8 | TAPERED STRUT<br> <b>FDW†</b><br>+46/–52 PSF |  |    |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/–14 PSF | SELECT W6 | SELECT W6                | SELECT W6                     | SELECT W6   | TAPERED STRUT<br> <b>FTWS†</b><br>+38/–42 PSF  |   |           |   |  |    |
|                              | 20'2" Wide Door    | SELECT W5                 | SELECT W5 | SELECT W5                | SELECT W5                     | <b>FS</b><br>+30/–33 PSF  |   |   |           |   |  |    |

# MODERN STEEL™ collection

| WINDCODE® AVAILABILITY CHART                                  |                    |                           |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---|--------------------|---------------------------|-----------|--------------------------|--------------------------------|--|--|--|--|---|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Common Door Widths  |                    | W1                        | W2        | W3                       | W4                             | W5   | W6   |  | W7   | W8  |   | W9  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Models 4308, 4309   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Model 4301  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4 | SELECT W4                | <b>FTWS</b><br>+28/-29 PSF     | SELECT W6                                  | <b>FTWS</b><br>+38/-44 PSF                                   |  | SELECT W8                                  | <b>FDTW</b><br>+48/-60 PSF                          |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4 | SELECT W4                | <b>FTWS</b><br>+25.5/-25.5 PSF | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-40 PSF                       | TAPERED STRUT<br><b>FTDWS</b><br>+38/-42 PSF | SELECT W8                                  | C-CHANNEL<br><b>FDW</b><br>+46.6/-52 PSF            | TAPERED STRUT<br><b>FTDW</b><br>+46/-52 PSF |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4 | SELECT W4                | <b>FTWS</b><br>+25.5/-25.5 PSF | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-40 PSF                       | TAPERED STRUT<br><b>FTDWS</b><br>+38/-42 PSF | SELECT W8                                  | C-CHANNEL<br><b>FW</b><br>+46.6/-52 PSF             | TAPERED STRUT<br><b>FTDW</b><br>+46/-52 PSF |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4 | SELECT W4                | <b>FTWS</b><br>+25/-25 PSF     | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-37 PSF                       | TAPERED STRUT<br><b>FTDWS</b><br>+38/-42 PSF | SELECT W8                                  | C-CHANNEL<br><b>F</b><br>+46/-50 PSF                | TAPERED STRUT<br><b>FTDW</b><br>+46/-50 PSF |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 20'2" Wide Door    | SELECT W5                 | SELECT W5 | SELECT W5                | SELECT W5                      | <b>FS</b><br>+30/-33 PSF                   |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Model 4132  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Model 4138  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Model 4051  | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W3 | <b>FS</b><br>+20/-21 PSF | SELECT W6                      | SELECT W6                                  | <b>FS</b><br>+37/-37 PSF                                     | <b>FS</b><br>+38/-42 PSF                     |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W3 | <b>FS</b><br>+20/-21 PSF | SELECT W5                      | <b>FS</b><br>+30/-30 PSF<br>or +32/-32 PSF |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W3 | <b>FS</b><br>+20/-21 PSF | SELECT W5                      | <b>FS</b><br>+30/-30 PSF<br>or +32/-32 PSF |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |           |                          |                                |  |  |  |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Model 4F  | 8', 9' Wide Door   | SELECT W8                 | SELECT W8 | SELECT W8                | SELECT W8                      | SELECT W8                                  | SELECT W8  |  | SELECT W8                                  | <b>FW</b> <sup>1</sup><br>+48/-54 or<br>+54/-62 PSF |   | <b>FDW</b><br>+62/-72 PSF   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 10', 12' Wide Door | SELECT W6                 | SELECT W6 | SELECT W6                | SELECT W6                      | SELECT W6                                  | TAPERED STRUT<br><b>FTDWS</b> *<br>+38/-42 PSF               |  | SELECT W8                                  | C-CHANNEL<br><b>FW</b><br>+46.6/-52 PSF             | TAPERED STRUT<br><b>FDW</b><br>+46/-50 PSF  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 16' Wide Door      | SELECT W6                 | SELECT W6 | SELECT W6                | SELECT W6                      | SELECT W6                                  | TAPERED STRUT<br><b>FTDWS</b> *<br>+38/-42 or<br>+36/-42 PSF |  | SELECT W8                                  | C-CHANNEL<br><b>FWF</b><br>+46.6/-52 PSF            | TAPERED STRUT<br><b>FDW</b><br>+46/-50 PSF  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|   | 18' Wide Door      | SELECT W6                 | SELECT W6 | SELECT W6                | SELECT W6                      | SELECT W6                                  | TAPERED STRUT<br><b>FTDWS</b> *<br>+36/-42 PSF               |  | TAPERED STRUT<br><b>FDW</b><br>+41/-46 PSF |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <b>S</b> Standard Windows Available<br><b>FT</b> Impact Rated |                    |                           |           |                          |                                |  |  |  |  |   |   | <b>W</b> Patented Impact Windows Available<br><b>F</b> Florida Approved |  |  |  |  |  |  |  |  |  |  |  | <b>D</b> Dade County Approved<br><b>T</b> Texas Department of Insurance Approved |  |  |  |  |  |  |  |  |  |  |  |


For W6–W8 doors over 9' wide, add 2" to the door opening.  
Standard windows are not available in Texas.

\*Model 9205 is not Texas approved.

†Model 4305 is not Florida, Dade or Texas approved.



# PREMIUM series

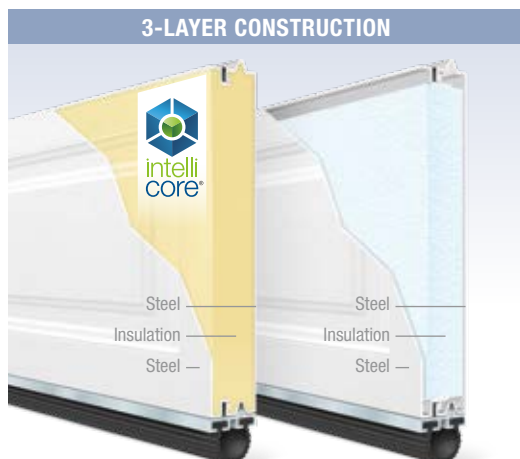


3-layer steel construction features Intellicore® polyurethane or polystyrene insulation sandwiched between two layers of heavy-duty steel for excellent energy efficiency, strength, durability and quietest operation.

## STYLE AND CONSTRUCTION


- 3-layer construction (steel + insulation + steel).
- Tongue-and-groove section joint and bottom weatherseal in a corrosion-resistant aluminum retainer help seal out the elements.
- Woodgrain embossed insulated steel base door painted front and back for a clean appearance.
- Prepainted white end stiles and interior steel backing for a clean appearance.
- R-values range from 18.4 to 6.5.

*Calculated door section R-value is in accordance with DASMA TDS-163.*

## COLOR OPTIONS

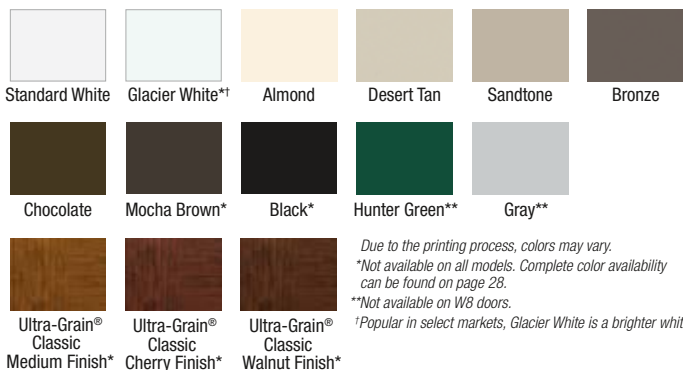

## PANEL OPTIONS



## PANEL DETAIL

Decorative panel edging and natural embossed woodgrain or stucco (Ultra-Grain® only) texture improve appearance close-up and from the curb.



## MODEL SPECIFICATIONS

| MODEL        | 9200, 9203             | 9130, 9133             | 4300, 4310             | 4050, 4053             |
|--------------|------------------------|------------------------|------------------------|------------------------|
| Panel Style  | Elegant Short and Long | Elegant Short and Long | Elegant Short and Long | Elegant Short and Long |
| Insulation   | 2" Polyurethane        | 1-3/8" Polyurethane    | 2" Polystyrene         | 1-3/8" Polystyrene     |
| Construction | 3-Layer                | 3-Layer                | 3-Layer                | 3-Layer                |
| R-value      | 18.4                   | 12.9                   | 9.0                    | 6.5                    |

# PREMIUM series

## WINDOW OPTIONS

### PALLADIAN™ SERIES



Palladian™ Short with Grilles



Palladian™ Short



Palladian™ Long with Grilles



Palladian™ Long

### WROUGHT IRON SERIES



Tuscany Short



Orleans Short



Tuscany Long



Orleans Long

### BRILLIANCE® SERIES



Solitaire Short



Marquise Short



Trillian Short



Solitaire Long




Marquise Long



Trillian Long

### LEADED SERIES (GLASS)




Trenton® Short



Roselle® Short



Ashford® Short




Carlisle® Short




Kristin® Short



Trenton® Long



Roselle® Long



Ashford® Long



Carlisle® Long



Kristin® Long

### ARCHITECTURAL SERIES



Plain Short



Short with Rectangular Grilles



Short with Square Grilles



Ashford® Short\*



Trenton® Short\*



Plain Long



Long with Rectangular Grilles



Long with Square Grilles



Ashford® Long\*



Trenton® Long\*



ARCH1 Plain



ARCH1 with Vertical Grilles



ARCH1 with Grilles



Kristin® Short\*



Clayton™ Short\*



ARCH2 Plain



ARCH2 with Vertical Grilles



ARCH2 with Grilles



Kristin® Long\*



Clayton™ Long\*

### PLAIN SERIES



Plain Short



Plain Long

### SNAP-IN SERIES



Cathedral 507



Colonial 509



Sunset 501 (4, 6, 8 or 10 panels across)



Sunset 502 (3, 6 or 9 panels across)



Sunset 504 (7 panels across only)



Sunset 505 (8 panels across only)



Charleston 508



Prairie 510



Sunset 503 (4 or 8 panels across)



Sunset 506 (5 or 10 panels across)



Charleston 608



Prairie 610



Madison Arch 613



Sunset 603 (2 or 4 long panels across)



Sunset 605 (4 long panels across)

\*Complements Clopay Entry Door glass.

### ACRYLIC



Wrought Iron Short\*



Wrought Iron Long\*



Wrought Iron Arch\*

Additional double width door designs available. Double strength glass is standard.

Impact rated windows available

# PREMIUM series

| WINDCODE® AVAILABILITY CHART |                    |                           |                          |                                |  |  |  |           |  |   |
|------------------------------|--------------------|---------------------------|--------------------------|--------------------------------|--|--|--|-----------|--|---|
| Common Door Widths           |                    | W1                        | W3                       | W4                             | W5   | W6                                     |  | W7        | W8                                       |   |
| Model 9200                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                | <b>FTS</b><br>+28/-29 PSF      | <b>FS</b><br>+30/-32 PSF                   | <b>FTWS</b><br>+38/-44 PSF             |  | SELECT W8 | <b>FTW</b><br>+48/-60 PSF                |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25.5/-25.5 PSF  | SELECT W6                                  | U-BAR<br><b>FWS</b><br>+37/-40 PSF     | TAPERED STRUT<br><b>FTWS</b><br>+38/-42 PSF  | SELECT W8 | C-CHANNEL<br><b>FW</b><br>+46.6/-52 PSF  | TAPERED STRUT<br><b>FTW</b><br>+46/-52 PSF  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25.5/-25.5 PSF  | SELECT W6                                  | U-BAR<br><b>FWS</b><br>+37/-40 PSF     | TAPERED STRUT<br><b>FTWS</b><br>+38/-42 PSF  | SELECT W8 | C-CHANNEL<br><b>FW</b><br>+46.6/-52 PSF  | TAPERED STRUT<br><b>FTW</b><br>+46/-52 PSF  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+24/-24.5 PSF    | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-37 PSF | TAPERED STRUT<br><b>FTWS</b><br>+38/-42 PSF  | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46/-50 PSF     | TAPERED STRUT<br><b>FTW</b><br>+46/-50 PSF  |
| Model 9203                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                | <b>FTS</b><br>+28/-29 PSF      | <b>FS</b><br>+30/-32 PSF                   | <b>FTS</b><br>+38/-44 PSF              |  | SELECT W8 | <b>FT</b><br>+48/-60 PSF                 |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25.5/-25.5 PSF  | SELECT W6                                  | U-BAR<br><b>FS</b><br>+37/-40 PSF      | TAPERED STRUT<br><b>FTS</b><br>+38/-42 PSF   | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46.6/-52 PSF   | TAPERED STRUT<br><b>FT</b><br>+46/-52 PSF   |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25.5/-25.5 PSF  | SELECT W6                                  | U-BAR<br><b>FS</b><br>+37/-40 PSF      | TAPERED STRUT<br><b>FTS</b><br>+38/-42 PSF   | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46.6/-52 PSF   | TAPERED STRUT<br><b>FT</b><br>+46/-52 PSF   |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+24/-24.5 PSF    | SELECT W6                                  | C-CHANNEL<br><b>FS</b><br>+37/-37 PSF  | TAPERED STRUT<br><b>FTS</b><br>+38/-42 PSF   | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46/-50 PSF     | TAPERED STRUT<br><b>FT</b><br>+46/-50 PSF   |
| Model 9130                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-20 PSF | <b>FS</b><br>+25/-28 PSF       | <b>FWS</b><br>+33/-37 PSF                  | <b>FS</b><br>+37/-37 PSF               |  |           |  |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | <b>FS</b><br>+24/-26 PSF       | <b>FWS</b><br>+32/-32 PSF                  |  |  |           |  |   |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | <b>FS</b><br>+24/-26 PSF       | <b>FWS</b><br>+32/-32 PSF                  |  |  |           |  |   |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FS</b><br>+24/-26 PSF       |  |  |  |           |  |   |
| Model 9133                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-20 PSF | <b>FS</b><br>+25/-28 PSF       | <b>FS</b><br>+33/-37 PSF                   | <b>FS</b><br>+37/-37 PSF               |  |           |  |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | <b>FS</b><br>+24/-26 PSF       | <b>FS</b><br>+32/-32 PSF                   |  |  |           |  |   |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | <b>FS</b><br>+24/-26 PSF       | <b>FS</b><br>+32/-32 PSF                   |  |  |           |  |   |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FS</b><br>+24/-26 PSF       |  |  |  |           |  |   |
| Model 4300                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                | <b>FTWS</b><br>+28/-29 PSF     | SELECT W6                                  | <b>FTWS</b><br>+38/-44 PSF             |  | SELECT W8 | <b>FDTW</b><br>+48/-60 PSF               |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTWS</b><br>+25.5/-25.5 PSF | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-40 PSF | TAPERED STRUT<br><b>FDTWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br><b>FDW</b><br>+46.6/-52 PSF | TAPERED STRUT<br><b>FDTW</b><br>+46/-52 PSF |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTWS</b><br>+25.5/-25.5 PSF | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-40 PSF | TAPERED STRUT<br><b>FDTWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br><b>FW</b><br>+46.6/-52 PSF  | TAPERED STRUT<br><b>FDTW</b><br>+46/-52 PSF |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTWS</b><br>+25/-25 PSF     | SELECT W6                                  | C-CHANNEL<br><b>FWS</b><br>+37/-37 PSF | TAPERED STRUT<br><b>FDTWS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46/-50 PSF     | TAPERED STRUT<br><b>FDTW</b><br>+46/-50 PSF |
|                              | 20'2" Wide Door    | SELECT W5                 | SELECT W5                | SELECT W5                      | <b>FS</b><br>+30/-33 PSF                   |  |  |           |  |   |
| Model 4310                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                | <b>FTS</b><br>+28/-29 PSF      | SELECT W6                                  | <b>FTS</b><br>+38/-44 PSF              |  | SELECT W8 | <b>FDT</b><br>+48/-60 PSF                |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25.5/-25.5 PSF  | SELECT W6                                  | C-CHANNEL<br><b>FS</b><br>+37/-40 PSF  | TAPERED STRUT<br><b>FDTDS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br><b>FD</b><br>+46.6/-52 PSF  | TAPERED STRUT<br><b>FDT</b><br>+46/-52 PSF  |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25.5/-25.5 PSF  | SELECT W6                                  | C-CHANNEL<br><b>FS</b><br>+37/-40 PSF  | TAPERED STRUT<br><b>FDTDS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46.6/-52 PSF   | TAPERED STRUT<br><b>FDT</b><br>+46/-52 PSF  |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                | <b>FTS</b><br>+25/-25 PSF      | SELECT W6                                  | C-CHANNEL<br><b>FS</b><br>+37/-37 PSF  | TAPERED STRUT<br><b>FDTDS</b><br>+38/-42 PSF | SELECT W8 | C-CHANNEL<br><b>F</b><br>+46/-50 PSF     | TAPERED STRUT<br><b>FDT</b><br>+46/-50 PSF  |
|                              | 20'2" Wide Door    | SELECT W5                 | SELECT W5                | SELECT W5                      | <b>FS</b><br>+30/-33 PSF                   |  |  |           |  |   |
| Model 4050                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-21 PSF | SELECT W6                      | SELECT W6                                  | <b>FS</b><br>+37/-37 PSF               | <b>FS</b><br>+38/-42 PSF                     |           |  |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5                      | <b>FS</b><br>+30/-30 PSF<br>or +32/-32 PSF |  |  |           |  |   |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5                      | <b>FS</b><br>+30/-30 PSF<br>or +32/-32 PSF |  |  |           |  |   |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |                          |                                |  |  |  |           |  |   |
| Model 4053                   | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>FS</b><br>+20/-21 PSF | SELECT W6                      | SELECT W6                                  | <b>FS</b><br>+37/-37 PSF               | <b>FS</b><br>+38/-42 PSF                     |           |  |   |
|                              | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5                      | <b>FS</b><br>+30/-30 PSF<br>or +32/-32 PSF |  |  |           |  |   |
|                              | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>FS</b><br>+20/-21 PSF | SELECT W5                      | <b>FS</b><br>+30/-30 PSF<br>or +32/-32 PSF |  |  |           |  |   |
|                              | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF |                          |                                |  |  |  |           |  |   |

**S** Standard Windows Available  
 Impact Rated


**W** Patented Impact Windows Available  
**F** Florida Approved

**D** Dade County Approved  
**T** Texas Department of Insurance Approved

For W6–W8 doors over 9' wide, add 2" to the door opening.  
 Standard windows are not available in Texas.



# VALUE PLUS series (builder grade)

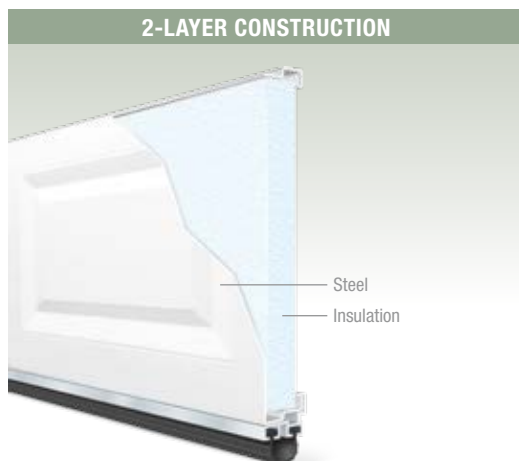

| MODEL SPECS          |           |           |
|----------------------|-----------|-----------|
| MODELS               | 76V/76VSP | 1500/15SP |
| Panel Styles         | Long      | Short     |
| Section Joint        | Shiplap   | Shiplap   |
| Steel Gauge          | 25        | 25        |
| Insulation Thickness | 1-5/16"   | 1-5/16"   |

Heavy-duty 2-layer steel construction with insulation for added comfort, energy efficiency and quiet operation.

## STYLE AND CONSTRUCTION

- 2-layer construction (steel + vinyl-backed polystyrene insulation).
- Woodgrain embossed insulated steel base door painted front and back for a virtually maintenance-free door.
- Quality 25 gauge steel and 2" thick frame construction for durability and longevity.
- Vinyl-backed insulation for a clean interior appearance.
- Polystyrene insulation: R-value 6.3.

Calculated door section R-value is in accordance with DASMA TDS-163.

## PANEL OPTIONS



Traditional Short (1500, 15SP)



Traditional Long (76V, 76VSP)

## COLOR OPTIONS



Due to the printing process, colors may vary.

| WINDCODE® AVAILABILITY CHART               |                    |                           |                           |   |   |   |  |  |  |
|--|--------------------|---------------------------|---------------------------|---|---|---|--|--|--|
| Common Door Widths                         |                    | W1**                      | W2                        | W3  | W4  |   | W5   |  |  |
| USE T52                                    |                    |                           |                           |   |   |   |  |  |  |
| Models 1500/15SP                           | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | <b>S</b><br>+16/-18.5 PSF | <b>FS</b><br>+20/-21 PSF  | <b>FTW'S</b><br>+25/-32 PSF                                     |   | <b>1500</b><br><b>FTW'S</b><br>+30/-32 PSF                                       | <b>15SP</b><br><b>FWS</b><br>+32/-37 PSF                     |  |
|  | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | <b>S</b><br>+15.5/-17 PSF | <b>FS</b><br>+20/-21 PSF  | <b>FTW'S*</b><br>+24/-24.5 PSF                                  |   | <b>1500</b><br><b>FTW'S</b><br>+30/-30 or +28/-30.5<br>or +32/-32 PSF            | <b>C-CHANNEL</b><br><b>15SP</b><br><b>FWS</b><br>+32/-37 PSF | <b>TAPERED STRUT</b><br><b>15SP</b><br><b>FWS</b><br>+32/-37 PSF |
|  | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | <b>S</b><br>+15.5/-17 PSF | <b>FS</b><br>+20/-21 PSF  | <b>FTW'S*</b><br>+24/-24.5 PSF                                  |   | <b>1500</b><br><b>FTW'S</b><br>+30/-30 or +28/-30.5<br>or +32/-32 PSF            | <b>C-CHANNEL</b><br><b>15SP</b><br><b>FWS</b><br>+32/-37 PSF | <b>TAPERED STRUT</b><br><b>15SP</b><br><b>FWS</b><br>+32/-37 PSF |
|  | 18' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W4                 | SELECT W4   | <b>C-CHANNEL</b><br><b>1500</b><br><b>FTW'S*</b><br>+25/-25 PSF | <b>TAPERED STRUT</b><br><b>1500</b><br><b>FTW'S*</b><br>+25/-27 PSF |  |  |  |
| Models 76V/76VSP                           | 8', 9' Wide Door   | <b>S</b><br>+13/-15 PSF   | SELECT W4                 | SELECT W4   | <b>FT</b><br>+25/-32 PSF  |   | <b>76V</b><br><b>FT</b><br>+30/-32 PSF   | <b>76VSP</b><br><b>F</b><br>+32 /-37 PSF                     |  |
|  | 10', 12' Wide Door | <b>S</b><br>+12.5/-14 PSF | SELECT W5                 | SELECT W5   | SELECT W5   |   | SELECT W5  | <b>C-CHANNEL</b><br><b>76VSP</b><br><b>F</b><br>+32/-37 PSF  | <b>TAPERED STRUT</b><br><b>76VSP</b><br><b>F</b><br>+32/-37 PSF  |
|  | 16' Wide Door      | <b>S</b><br>+12.5/-14 PSF | SELECT W5                 | SELECT W5   | SELECT W5   |   | SELECT W5  | <b>C-CHANNEL</b><br><b>76VSP</b><br><b>F</b><br>+32/-37 PSF  | <b>TAPERED STRUT</b><br><b>76VSP</b><br><b>F</b><br>+32/-37 PSF  |
|  | 18' Wide Door      | +12.5/-14 PSF             |                           |   |   |   |  |  |  |
| Standard Windows Available<br>Impact Rated |                    |                           |                           | <b>W</b> Patented Impact Windows Available<br><b>F</b> Florida Approved |   |   | <b>D</b> Dade County Approved<br><b>T</b> Texas Department of Insurance Approved |  |  |

For W6-W8 doors over 9' wide, add 2" to the door opening.


\*Long window availability is limited due to reinforcement requirements.

\*\*For W1, Model T52 is used. Model T52 is a tongue-and-groove 2-layer door.

\*Impact windows are not available in Texas.

# VALUE series

(builder grade)

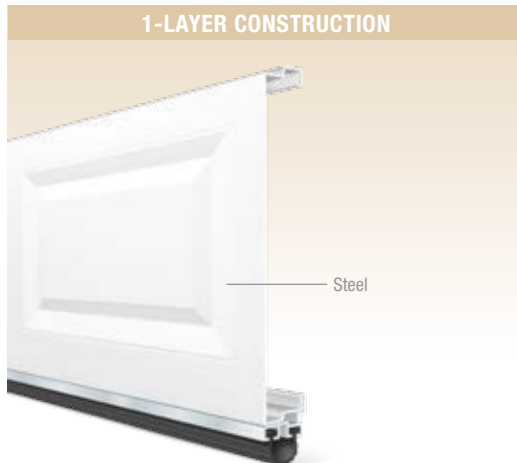

## MODEL SPECS

| MODELS               | 73                | 76               | 94                |
|----------------------|-------------------|------------------|-------------------|
| Panel Styles         | Traditional Short | Traditional Long | Traditional Short |
| Steel Gauge          | 25                | 25               | 24                |
| Insulation Thickness | N/A               | N/A              | N/A               |

## PANEL OPTIONS



Traditional Short (73, 94)



Traditional Long (76)

Single-layer, non-insulated steel construction provides beauty and durability at an economical value.

## STYLE AND CONSTRUCTION

- 1-layer construction (steel).
- Woodgrain embossed steel base door painted front and back for a virtually maintenance-free door.
- Quality 24 or 25 gauge steel and 2" thick frame construction for durability and longevity.
- Woodgrain textured short and long raised panel designs in 1-layer construction complement traditional home styles.

## COLOR OPTIONS



Due to the printing process, colors may vary.

## WINDCODE® AVAILABILITY CHART

| Common Door Widths |                    | W1**   | W2   | W3   | W4   | W5  | W6   |   | W7   |   | W8   |   | W9   |
|--------------------|--------------------|--|--|--|--|---|--|---|--|---|--|---|--|
| USE T50            |                    |  |  |  |  |   |  |   |  |   |  |   |  |
| Model 94           | 8', 9' Wide Door   | <br>+13/-15 PSF     | <br>+16/-18.5 PSF | <br>+20/-21 PSF |  FTWS<br>+25/-32 PSF    |  FTWS<br>+30/-32 PSF                         |  FTWS*<br>+38/-42 PSF   |   |  FDW<br>+42/-48 PSF   |   |  FW†<br>+48/-54 or +54/-62 PSF  |   |  FDW<br>+62/-72 PSF |
|                    | 10', 12' Wide Door | <br>+12.5 / -14 PSF | <br>+15.5/-17 PSF | <br>+20/-21 PSF |  FTWS*<br>+24/-24.5 PSF |  FTWS<br>+30/-30 or +28/-30.5 or +32/-32 PSF |  C-CHANNEL<br> FWS*<br>+37/-41 PSF |  TAPERED STRUT<br> FTDWS*<br>+38/-42 PSF            |  FW<br>+42/-48 PSF  |   |  C-CHANNEL<br> FW<br>+46.6/-52 PSF |  TAPERED STRUT<br> FDW<br>+46/-50 PSF |  |
|                    | 16' Wide Door      | <br>+12.5/-14 PSF   | <br>+15.5/-17 PSF | <br>+20/-21 PSF |  FTWS*<br>+24/-24.5 PSF |  FTWS<br>+30/-30 or +28/-30.5 or +32/-32 PSF |  C-CHANNEL<br> FWS*<br>+37/-41 PSF |  TAPERED STRUT<br> FTDWS*<br>+38/-42 or +36/-42 PSF |  FW<br>+42/-48 PSF  |   |  C-CHANNEL<br> FW<br>+46.6/-52 PSF |  TAPERED STRUT<br> FDW<br>+46/-50 PSF |  |
|                    | 18' Wide Door      | <br>+12.5/-14 PSF   | SELECT W4  | SELECT W4  |  FTWS*<br>+25/-25 PSF   | SELECT W6   |  C-CHANNEL<br> FWS*<br>+37/-37 PSF |  TAPERED STRUT<br> FTDWS*<br>+36/-42 PSF            |  C-CHANNEL<br> FW<br>+42/-46 PSF |  TAPERED STRUT<br> FDW<br>+41/-46 PSF |  |   |  |



| WINDCODE® AVAILABILITY CHART                   |                    |                    |                    |                   |  |  |   |  |   |   |                                      |                                      |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--------------------|--------------------|--------------------|-------------------|--|--|---|--|---|---|--------------------------------------|--------------------------------------|--------------------------------|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Common Door Widths                             |                    | W1**               | W2                 | W3                | W4   |  | W5  |  |   | W6  |                                      | W7                                   | W8                             |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| USE T50  |                    |                    |                    |                   |  |  |   |  |   |   |                                      |                                      |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Models 73/73SP                                 | 8', 9' Wide Door   | S<br>+13/–15 PSF   | S<br>+16/–18.5 PSF | FS<br>+20/–21 PSF | FTW <sup>‡</sup> S<br>+25/–32 PSF                    |  | 73<br>FTW <sup>‡</sup> S<br>+30/–32 PSF                               |  | 73SP<br>FWS<br>+32/–37 PSF              |   | FTWS<br>+38/–44 PSF                  |                                      | FW<br>+42/–48 PSF              | FW<br>+46/–50 PSF   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | 10', 12' Wide Door | S<br>+12.5/–14 PSF | S<br>+15.5/–17 PSF | FS<br>+20/–21 PSF | FTW <sup>‡</sup> S<br>+24/–24.5 PSF                  |  | 73<br>FTW <sup>‡</sup> S<br>+28/–30.5 or<br>+30/–30 or<br>+32/–32 PSF |  | C-CHANNEL<br>73SP<br>FWS<br>+32/–37 PSF | TAPERED STRUT<br>73SP<br>FWS<br>+32/–37 PSF | C-CHANNEL<br>FWS<br>+37/–41 PSF      | TAPERED STRUT<br>FTWS<br>+36/–42 PSF | C-CHANNEL<br>FW<br>+42/–48 PSF |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | 16' Wide Door      | S<br>+12.5/–14 PSF | S<br>+15.5/–17 PSF | FS<br>+20/–21 PSF | FTW <sup>‡</sup> S<br>+24/–24.5 PSF                  |  | 73<br>FTW <sup>‡</sup> S<br>+28/–30.5 or<br>+30/–30 or<br>+32/–32 PSF |  | C-CHANNEL<br>73SP<br>FWS<br>+32/–37 PSF | TAPERED STRUT<br>73SP<br>FWS<br>+32/–37 PSF | C-CHANNEL<br>FWS<br>+37/–41 PSF      | TAPERED STRUT<br>FTWS<br>+36/–42 PSF | C-CHANNEL<br>FW<br>+42/–48 PSF |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | 18' Wide Door      | S<br>+12.5/–14 PSF | SELECT W4          | SELECT W4         | C-CHANNEL<br>73<br>FTW <sup>‡</sup> S<br>+25/–25 PSF | TAPERED STRUT<br>73<br>FTW <sup>‡</sup> S<br>+25/–27 PSF | SELECT W6   |  |   | C-CHANNEL<br>FS<br>+37/–37 PSF              | TAPERED STRUT<br>FTWS<br>+36/–42 PSF |                                      |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Models 76/76SP                                 | 8', 9' Wide Door   | S<br>+13/–15 PSF   | SELECT W4          | SELECT W4         | FT<br>+25/–32 PSF                                    |  | 76<br>FT<br>+30/–32 PSF   |  | 76SP<br>F<br>+32/–37 PSF                |   | FT<br>+38/–44 PSF                    |                                      |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | 10', 12' Wide Door | S<br>+12.5/–14 PSF | SELECT W5          | SELECT W5         | SELECT W5  |  | 76<br>FT<br>+28/–30.5 or<br>+30/–30 or<br>+32/–32 PSF                 |  | C-CHANNEL<br>76SP<br>F<br>+32/–37 PSF   | TAPERED STRUT<br>76SP<br>F<br>+32/–37 PSF   | C-CHANNEL<br>F<br>+37/–41 PSF        | TAPERED STRUT<br>F<br>+36/–42 PSF    |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | 16' Wide Door      | S<br>+12.5/–14 PSF | SELECT W5          | SELECT W5         | SELECT W5  |  | 76<br>FT<br>+28/–30.5 or<br>+30/–30 or<br>+32/–32 PSF                 |  | C-CHANNEL<br>76SP<br>F<br>+32/–37 PSF   | TAPERED STRUT<br>76SP<br>F<br>+32/–37 PSF   | C-CHANNEL<br>F<br>+37/–41 PSF        | TAPERED STRUT<br>F<br>+36/–42 PSF    |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | 18' Wide Door      | +12.5/–14 PSF      |                    |                   |  |  |   |  |   |   |                                      |                                      |                                |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| S Standard Windows Available<br>Ⓢ Impact Rated |                    |                    |                    |                   |  |  |   |  |   |   |                                      |                                      |                                | W Patented Impact Windows Available<br>F Florida Approved |  |  |  |  |  |  |  |  |  |  |  |  |  | D Dade County Approved<br>T Texas Department of Insurance Approved |  |  |  |  |  |  |  |  |  |  |  |  |  |

For W6–W8 doors over 9' wide, add 2" to the door opening.

For W6, Model 76 doors are not available over 16'2" wide.

\*Long window availability is limited due to reinforcement requirements.

\*\*For W1, Model T50 is used. Model T50 is a tongue-and-groove 1-layer door.

<sup>‡</sup>Impact windows available at +48/-54 PSF.

<sup>†</sup>Impact windows not available in Texas.



# VALUE PLUS & VALUE series



Value Series Traditional Short Panel with  
Prairie 510 Window Design shown in Standard White

## WINDOW OPTIONS

### WROUGHT IRON SERIES



Tuscany Short



Tuscany Long



Orleans Short



Orleans Long

### BRILLIANCE® SERIES



Solitaire Short



Solitaire Long



Marquise Short



Marquise Long



Trillian Short



Trillian Long

### LEADED SERIES (GLASS)



Trenton® Short



Trenton® Long



Roselle® Short




Roselle® Long



Ashford® Short



Ashford® Long



Carlisle® Short



Carlisle® Long



Kristin® Short



Kristin® Long

 Impact rated windows available

### PLAIN SERIES



Plain Short



Plain Long

### SNAP-IN SERIES



Cathedral 507



Charleston 508



Colonial 509




Prairie 510



Sunset 501 (4, 6, 8 or 10 panels across)



Sunset 503 (4 or 8 panels across)



Sunset 502 (3, 6 or 9 panels across)



Sunset 506 (5 or 10 panels across)



Sunset 504 (7 panels across only)



Sunset 505 (8 panels across only)



Cathedral 607



Charleston 608



Stockton 612



Prairie 610



Madison 611



Madison Arch 613



Sunset 601 (2, 3, 4 or 5 long panels across)




Sunset 603 (2 or 4 long panels across)



Sunset 605 (4 long panels across)



# GRAND HARBOR® collection

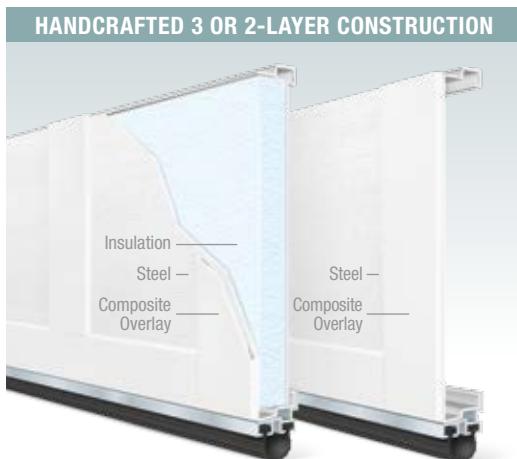

When budget is the deciding factor, this low maintenance, insulation-optional steel frame carriage house style garage door combines clean lines and classic charm to provide a popular style at a great value. Accented with decorative black wrought iron hardware, these doors have the appearance of a swing-out door, but offer the convenience of modern overhead operation.

## STYLE AND CONSTRUCTION


- Woodgrain embossed 24 gauge, 2" steel frame construction with 1/2" smooth composite overlay creates authentic carriage house styling.
- Model GH is non-insulated.
- Model GHV has 1-5/8" vinyl-backed insulation that improves energy efficiency with a 6.3 R-value.
- Available in 8 different designs.
- Window options include square, rectangular and arch windows with removable grilles. Glazing includes DSB clear or obscure glass and acrylic wrought iron designs. Unique faux window top sections are also an option.

*Calculated door section R-value is in accordance with DASMA TDS-163.*


## COLOR OPTIONS



## DOOR DESIGNS

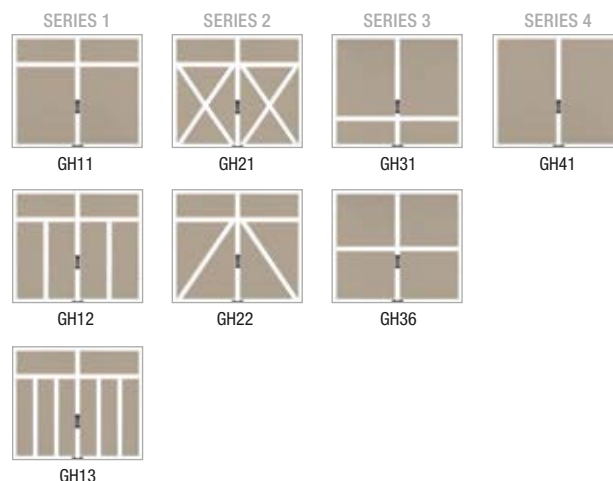

## WINDOW OPTIONS

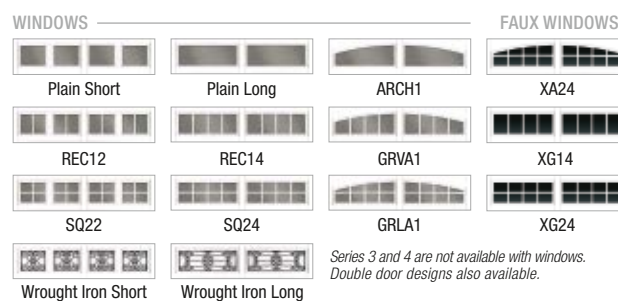

## WINDCODE® AVAILABILITY CHART


| Common Door Widths   |                  | W1   | W3        | W4   | W5                        | W6                        | W7 | W8 |
|--|------------------|--|-----------|--|---------------------------|---------------------------|----|----|
| Grand Harbor®  | 8', 9' Wide Door | <b>S</b><br>+12/-15 PSF  | SELECT W4 | <b>FS</b><br>+25/-32 PSF   | <b>FS*</b><br>+30/-32 PSF | <b>FS*</b><br>+37/-37 PSF |    |    |
|  | 16' Wide Door    | <b>S</b><br>+12.5/-14 PSF                                      | SELECT W4 | <b>FS*</b><br>+24/-24.5 PSF  | <b>FS*</b><br>+30/-30 PSF | <b>FS*</b><br>+37/-37 PSF |    |    |
|  | 18' Wide Door    | <b>S</b><br>+12.5/-14 PSF                                      | SELECT W4 | <b>FS*</b><br>+25/-25 PSF  |                           |                           |    |    |
| <b>S</b> Standard Windows Available<br><b>Impact Rated</b> |                  | <b>W</b> Impact Windows Available<br><b>F</b> Florida Approved |           | <b>D</b> Dade County Approved<br><b>T</b> Texas Department of Insurance Approved |                           |                           |    |    |

*For W6-W8 doors over 9' wide, add 2" to the door opening.*

*\*Long window availability is limited due to reinforcement requirements.*

# LIMITED EDITION series

## HANDCRAFTED 5 OR 4-LAYER CONSTRUCTION

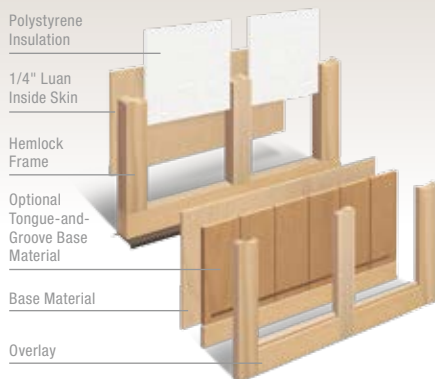


Distinguish your home with Clopay's Reserve® Wood Collection Limited Edition Series, a line of eight polystyrene insulated wood door styles based on the most inspired (and requested) custom designs.

### STYLE AND CONSTRUCTION

- Doors are available in 8 classic designs with 13 window/top section styles.
- Windows are single pane, double strength 1/8" clear glass and true divided lites (obscure glass optional).
- Standard and optional decorative hardware available.
- Handcrafted 5 or 4-layer polystyrene insulated wood door construction with a 5.9 R-value.
- 1/4" thick imported hardwood interior backer glued to stiles and rails.
- Tongue-and-groove section joint.
- All doors can be factory primed or finish painted white. Factory stain available for stained grade wood species.

*Calculated door section R-value is in accordance with DASMA TDS-163.*

### DOOR DESIGNS

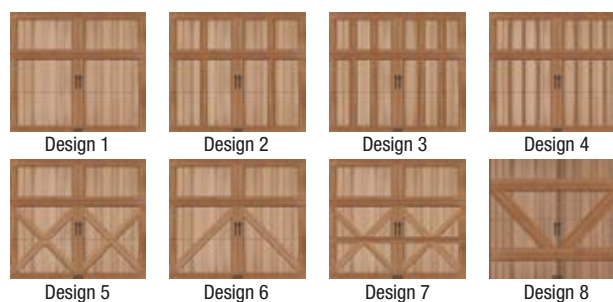

### WINDOW OPTIONS



*Double door designs also available.*

### MATERIAL OPTIONS

#### OVERLAYS



#### BASE FACE MATERIALS



*\*MDO base cannot be stained.*

*\*\*On Tongue-and-Groove (T&G) base doors, the wood species must match overlay species.*

### WINDCODE® AVAILABILITY CHART

| Common Door Widths   |                    | W1   | W3        | W4        | W5   | W6                          | W7 | W8 |
|--|--------------------|--|-----------|-----------|--|-----------------------------|----|----|
| Limited Edition Series                                       | 8', 9' Wide Door   | <b>S</b><br>+13 / -15 PSF                                      | SELECT W6 | SELECT W6 | SELECT W6  | <b>F S</b><br>+39 / -45 PSF |    |    |
|  | 10', 12' Wide Door | <b>S</b><br>+12.5 / -14 PSF                                    |           |           |  |                             |    |    |
|  | 16' Wide Door      | <b>S</b><br>+12.5 / -14 PSF                                    |           |           |  |                             |    |    |
|  | 18' Wide Door      |  |           |           |  |                             |    |    |
| <b>S</b> Standard Windows Available<br><b>I</b> Impact Rated |                    | <b>W</b> Impact Windows Available<br><b>F</b> Florida Approved |           |           | <b>D</b> Dade County Approved<br><b>T</b> Texas Department of Insurance Approved |                             |    |    |

*For W6-W8 doors over 9' wide, add 2" to the door opening.*

## SEMI-CUSTOM series

## HANDCRAFTED 2-LAYER CONSTRUCTION




Just because your garage door is a standard size doesn't mean it deserves a standard, cookie-cutter door. That's why Clopay has created its Reserve® Wood Collection Semi-Custom Series. These upward-acting wood doors operate just like conventional, modern garage doors.

## STYLE AND CONSTRUCTION

- Handcrafted 2-layer wood doors. Swing-out appearance – modern operation.
- Semi-Custom Series available in 6 door designs and 10 window or top sections for multiple door design options.
- Obscure, insulated and special glass options available.
- Premium grade hardware, rollers and track assure smooth, quiet, long-lasting operation.

## DOOR DESIGNS

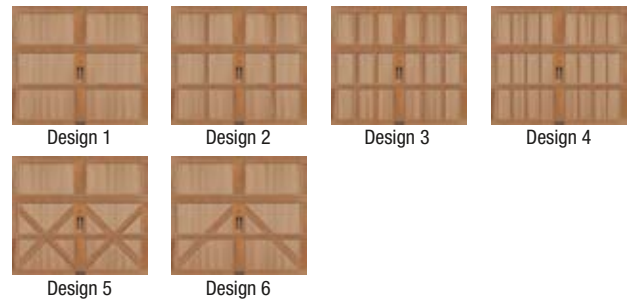


## WINDOW OPTIONS



Double door designs also available.

## MATERIAL OPTIONS

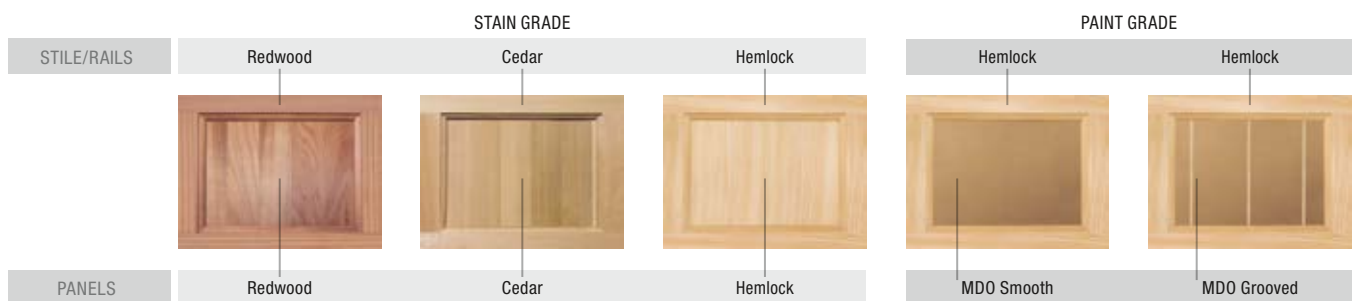

Differences in grain and color variations are indicative of natural wood.

Paint grade and grooved doors cannot be stained.

## WINDCODE® AVAILABILITY CHART

| Common Door Widths   |                    | W1                        | W3   | W4        | W5                            | W6   | W7 | W8 |
|--|--------------------|---------------------------|--|-----------|-------------------------------|--|----|----|
| Semi-Custom Series   | 8', 9' Wide Door   | <b>S</b><br>+13 / -15 PSF | SELECT W5  | SELECT W5 | <b>FS</b><br>+32 / -36 PSF    |  |    |    |
|  | 10', 12' Wide Door | <b>S</b><br>+12 / -14 PSF | SELECT W5  | SELECT W5 | <b>FS*</b><br>+30 / -33.3 PSF |  |    |    |
|  | 16' Wide Door      | <b>S</b><br>+12 / -14 PSF | SELECT W5  | SELECT W5 | <b>FS*</b><br>+30 / -33.3 PSF |  |    |    |
|  | 18' Wide Door      |                           |  |           |                               |  |    |    |
| <b>S</b> Standard Windows Available<br><b>I</b> Impact Rated |                    |                           | <b>W</b> Impact Windows Available<br><b>F</b> Florida Approved |           |                               | <b>D</b> Dade County Approved<br><b>T</b> Texas Department of Insurance Approved |    |    |

\*Available only in Hemlock.

# PRODUCT SELECTION CHART

| Collection    | Series                  | Model / Design  | Door / Panel Style | Construction / Material   | Colors   |
|---------------|-------------------------|---|--------------------|---|--|
| Avante™       |                         | Full or Partial View Design                             | Contemporary       | Aluminum Frame + Glass/Acrylic Panels<br>Aluminum Frame + Aluminum Panels   | Clear Aluminum Anodized, Standard White, Bronze Painted, Chocolate Painted, Bronze Anodized, Black Anodized, Dark Bronze Anodized or Powder Coated Custom Colors, Ultra-Grain® Cherry: Light and Dark Finishes |
| Canyon Ridge® | Limited Edition Series  | 15 Door Designs, 14 Window or Solid Top Section Designs | Carriage House     | 5 Layers: Clear Cypress, Mahogany and Pecky Cypress textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Cladding + Overlay    | Medium Finish, Dark Finish, Walnut Finish, Whitewash, Primed (for those wishing to custom paint or stain their door)   |
| Canyon Ridge® | Ultra-Grain® Series     | 14 Door Designs, 14 Window or Solid Top Section Designs | Carriage House     | 4 Layers: Clear Cypress textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Overlay   | Ultra-Grain® Cypress: Medium and Walnut Finishes   |
| Coachman®     |                         | 15 Door Designs, 10 Window or Solid Top Section Designs | Carriage House     | 4 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel + Composite Steel + 2" or 1-3/8" Polystyrene Insulation + Steel + Composite | Base: Standard White, Almond, Desert Tan, Sandtone Overlay: Standard White, Almond, Desert Tan, Sandtone   |
| Grand Harbor® |                         | 8 Door Designs, 16 Window or Solid Top Section Designs  | Carriage House     | 3 or 2 Layers: Composite + Steel + Insulation Composite + Steel   | Base: Standard White, Almond, Desert Tan, Sandtone Overlay: Standard White   |
| Gallery®      | Three-Layer             | 2 Door Designs, 25 Window or Solid Top Section Designs  | Carriage House     | 3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel Steel + 2" or 1-3/8" Polystyrene Insulation + Steel                         | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Ultra-Grain® Oak: Medium, Dark and Walnut Finishes   |
| Gallery®      | Three-Layer             | 2 Door Designs, 25 Window or Solid Top Section Designs  | Carriage House     | 3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black   |
| Gallery®      | Two-Layer and One-Layer | 2 Door Designs, 25 Window or Solid Top Section Designs  | Carriage House     | 2 or 1 Layers: Steel + 1-5/16" Polystyrene Insulation; Steel  | Standard White, Almond, Desert Tan, Sandtone, Chocolate*   |
| Collection    | Series                  | Model / Design  | Door / Panel Style | Construction / Material   | Colors   |
| Modern Steel™ | Premium                 | 9202, 9201, 9208 No Panel                               | Modern Flush       | 3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green†, Gray†, Ultra-Grain® Cypress: Medium, Cherry and Walnut Finishes                             |
| Modern Steel™ | Premium                 | 9205, 9209 No Panel                                     | Modern Grooved     | 3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Ultra-Grain® Cypress: Medium, Cherry and Walnut Finishes   |
| Modern Steel™ | Premium                 | 9132, 9131, 9138 No Panel                               | Modern Flush       | 3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green†, Gray†   |
| Modern Steel™ | Premium                 | 9139 No Panel   | Modern Grooved     | 3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black   |
| Modern Steel™ | Premium                 | 4302, 4301, 4308 No Panel                               | Modern Flush       | 3 Layers: Steel + 2" Polystyrene Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green†, Gray†, Ultra-Grain® Cypress: Medium, Cherry and Walnut Finishes**                           |
| Modern Steel™ | Premium                 | 4305, 4309 No Panel                                     | Modern Grooved     | 3 Layers: Steel + 2" Polystyrene Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Ultra-Grain® Cypress: Medium, Cherry and Walnut Finishes   |
| Modern Steel™ | Premium                 | 4132 No Panel   | Modern Flush       | 3 Layers: Steel + 1-3/8" Polystyrene Insulation + Steel   | Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Black, Ultra-Grain® Cypress: Medium, Cherry and Walnut Finishes   |
| Modern Steel™ | Premium                 | 4051, 4138 No Panel                                     | Modern Flush       | 3 Layers: Steel + 1-3/8" Polystyrene Insulation + Steel   | Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Hunter Green†, Gray†  |
| Modern Steel™ | Value                   | 4F No Panel   | Modern Flush       | 1 Layer: Steel  | Standard White, Almond, Desert Tan, Sandtone, Chocolate  |
| Classic™      | Premium                 | 9200 Raised Panel                                       | Elegant Short      | 3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green, Gray, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes                               |
| Classic™      | Premium                 | 9203 Raised Panel                                       | Elegant Long       | 3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green, Gray, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes                               |
| Classic™      | Premium                 | 9130 Raised Panel                                       | Elegant Short      | 3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green, Gray, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes                               |
| Classic™      | Premium                 | 9133 Raised Panel                                       | Elegant Long       | 3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green, Gray   |
| Classic™      | Premium                 | 4300 Raised Panel                                       | Elegant Short      | 3 Layers: Steel + 2" Polystyrene Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green, Gray, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes                               |
| Classic™      | Premium                 | 4310 Raised Panel                                       | Elegant Long       | 3 Layers: Steel + 2" Polystyrene Insulation + Steel   | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Black, Hunter Green, Gray, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes                               |
| Classic™      | Premium                 | 4050 Raised Panel                                       | Elegant Short      | 3 Layers: Steel + 1-3/8" Polystyrene Insulation + Steel   | Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Hunter Green, Gray  |
| Classic™      | Premium                 | 4053 Raised Panel                                       | Elegant Long       | 3 Layers: Steel + 1-3/8" Polystyrene Insulation + Steel   | Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Hunter Green, Gray  |
| Classic™      | Value Plus              | 1500 and 15SP Raised Panel                              | Traditional Short  | 2 Layers: Steel + 1-5/16" Polystyrene Insulation  | Standard White, Almond, Desert Tan, Sandtone, Chocolate  |
| Classic™      | Value Plus              | 76V and 76VSP Raised Panel                              | Traditional Long   | 2 Layers: Steel + 1-5/16" Polystyrene Insulation  | Standard White, Almond, Desert Tan, Sandtone, Chocolate  |
| Classic™      | Value†                  | 73 and 94 Raised Panel                                  | Traditional Short  | 1 Layer: Steel  | Standard White, Almond, Desert Tan, Sandtone, Chocolate  |
| Classic™      | Value†                  | 76 Raised Panel   | Traditional Long   | 1 Layer: Steel  | Standard White, Almond, Desert Tan, Sandtone, Chocolate  |
| Collection    | Series                  | Model / Design  | Door / Panel Style | Construction / Material   | Finishing Options  |
| Reserve® Wood | Custom Series           | Custom  | Carriage House     | 5 or 4 Layers: Specified Wood; Insulated  | Stained, Finish Painted White, Primed, Unfinished  |
| Reserve® Wood | Limited Edition Series  | 8 Door Designs, 13 Window or Solid Top Section Designs  | Carriage House     | 5 or 4 Layers: Meranti, Cedar, Redwood, Fir, MDO, Luan; Insulated   | Stained, Finish Painted White, Primed, Unfinished  |
| Reserve® Wood | Semi-Custom Series      | 6 Door Designs, 10 Window or Solid Top Section Designs  | Carriage House     | 2 Layers: Hemlock, Cedar, Redwood, MDO Panels; Hemlock, Cedar, Redwood Frame  | Stained, Finish Painted White, Primed, Unfinished  |

\*Not available on 24 gauge long panel models.

\*\*Not available on Model 4301.

†Not available on Models 9202, 9208, 9132, 9138, 4302, 4308, 4138.

‡Not all models available in all regions. See your Clopay Dealer for model availability in your region.

Clopay's patents mentioned throughout are 9,022,091 for impact windows, D719,280 and D755,409 for tapered strut.



Clopay is the **ONLY** garage door manufacturer backed by the Good Housekeeping Seal.



For more detailed product specification information or availability of Clopay WINDCODE® Garage Doors, please contact your Clopay Dealer. To locate a dealer to help you select the right door for your home, just go to [www.clopaydoor.com/dealer](http://www.clopaydoor.com/dealer) or call **1-800-2CLOPAY (225-6729)**.

Follow us on       

Effective June 2016

(Subject to change without notice)



©2016 Clopay Building Products Company, Inc., a Griffon company.

RSR-WCBRFL-12\_REV0616